



- Swift Change Shafts



- Fully Sealed Oil Bath

- High Material Throughput

All Star Screening Bucket


4-6

Carrier Weight	4-6Ton/8800-13000lbs
Shafts	3
Weight	400Kg 881lbs
Hydraulic Req.	50l/min 70-180bar 13.2gal/min 70-180bar
Volume	0.21m ³ 0.28yd ³
Output Capability	15-20 TPH 19-26 YdsPH
Inside Width	822mm 32 inches
Opening Width	1161mm 45.5 inches

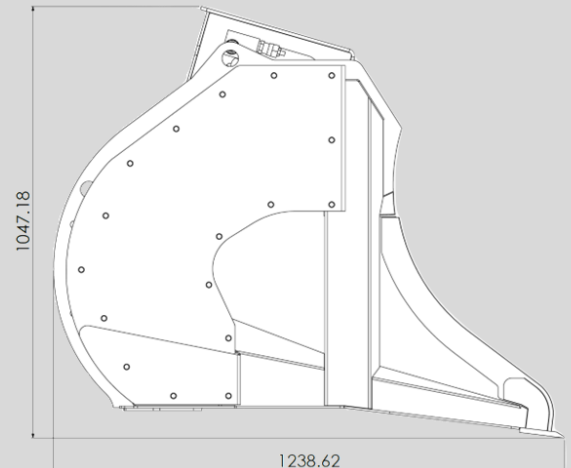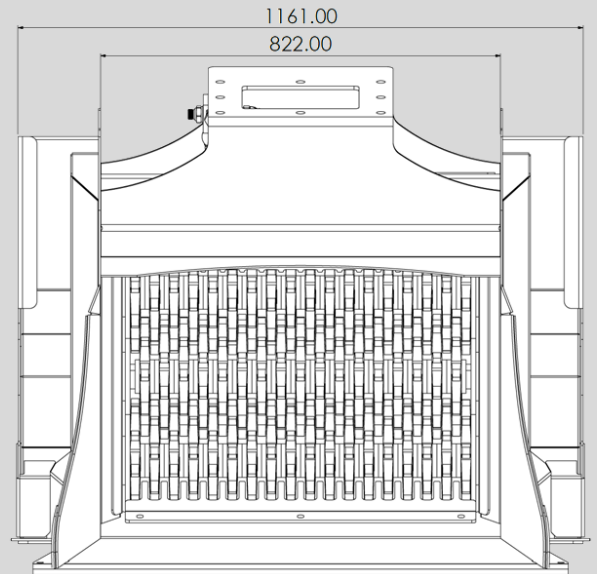

Revolutionising On Site Screening
WORLDWIDE

LESS = MORE

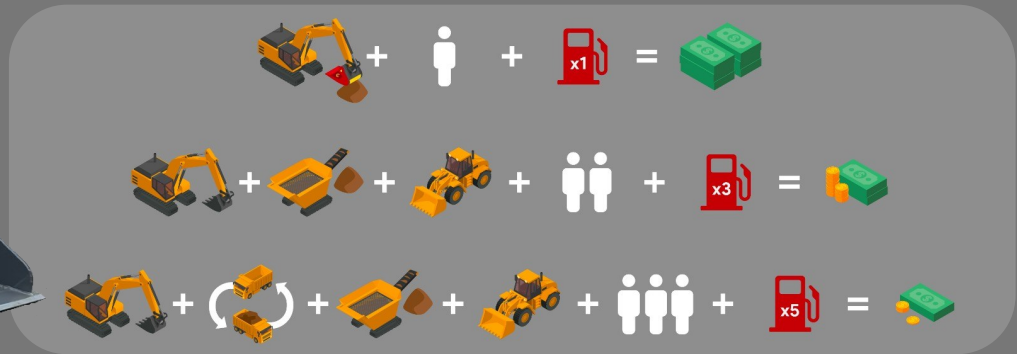

Less Plant + Less man hours + Less Fuel = MORE PROFIT!

One bucket, 6 screening options

3/8" - 10mm	Optional
• Soils, Peat, Compost, Bagged Material Etc. • Pipe Bedding and Padding	
1/2" - 15mm	Optional
• Bagged Top soil • Top Dressings • Potting Compost • River Bank Cleaning • Gypsum	
3/4" - 20mm	Standard
• Top Soil • Peat • Stone Cleaning • Compost Mixing • Aggregate Sizing • Biomass Waste • Furnace Waste	
1-1/4" - 30mm	Optional
• Wood Chip • Golf Course Construction • Land Reclamation • Farm Land Restoration • Vegetable Cleaning	
1-1/2" - 40mm	Optional
• Scalping • Recycling • Stone Wall Restoration • Large Aggregate Screening • Plasterboard	
2" - 50mm	Optional
• Scalping • Recycling • Stone Wall Restoration • Large Aggregate Screening • Land Reclamation	

