

Technical Data:


	HELIX 1004 XL	HELIX 1205	HELIX 1508	IMK 35500
Max. Working Height	9,70 m	12,00 m	15,00 m	-
Max. Platform Height	7,70 m	10,00 m	13,00 m	-
Max. Height of Hook	-	-	-	10,50 m
Max. Horizontal Outreach	4,00 m	5,15 m	8,00 m	5,10 m
Max. Lifting Capacity	300 kg	200 kg	200 kg	500 kg
Transport Length	3,24 m	3,24 m	4,13 m	2,98 m
Transport Width	0,98 m	0,98 m	1,20 m	0,98 m
Transport Height	2,00 m	2,00 m	2,26 m	2,37 m
Weight	3.900 kg	4.800 kg	7.700 kg	4.800 kg
Length (Platform)	1,34 m	0,75 m	1,00 m	-
Width (Platform)	0,98 m	0,98 m	1,18 m	-
Height (Platform)	1,10 m	1,10 m	1,10 m	-
Pivoting Radius (Platform)	60° + 60°	90° + 85°	90° + 85°	-
Pivoting Radius (Machine)	355°	355°	355°	355°
Steering Angle	85°	85°	85°	85°
Angle of Inclination	3°	3°	3°	1,5°
Gradability	16 %	16 %	16 %	16 %

Additional Equipment:

Standard (HELIX)	Non-Marking Tires	Optional (HELIX)	Front Wheel Steering
Standard (HELIX)	230 V Socket on Platform	Optional (HELIX)	Air Connection on Platform
Standard (HELIX+IMK)	Aquamatic (Batteries)	Optional (HELIX)	Water Connection on Platform
Standard (HELIX+IMK)	Operating-Hour-Counter	Optional (HELIX+IMK)	Gel-Batteries
Standard (HELIX+IMK)	Flashing-Light	Optional (HELIX+IMK)	Spotlight (LED)
Standard (IMK)	Antistatic Wheels (ESD)	Optional (HELIX+IMK)	Rotating Beacon
Standard (IMK)	Boom Extension (1 m)	Optional (HELIX+IMK)	Special Paintwork (RAL)
Standard (IMK)	Radio Remote Control	Optional (IMK)	Industrial Camera

Technical alterations reserved!

HELIX 1508

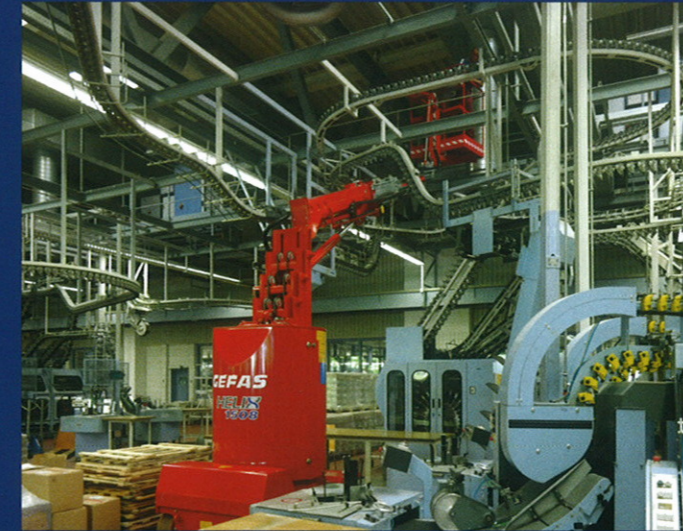

IMK 35500

