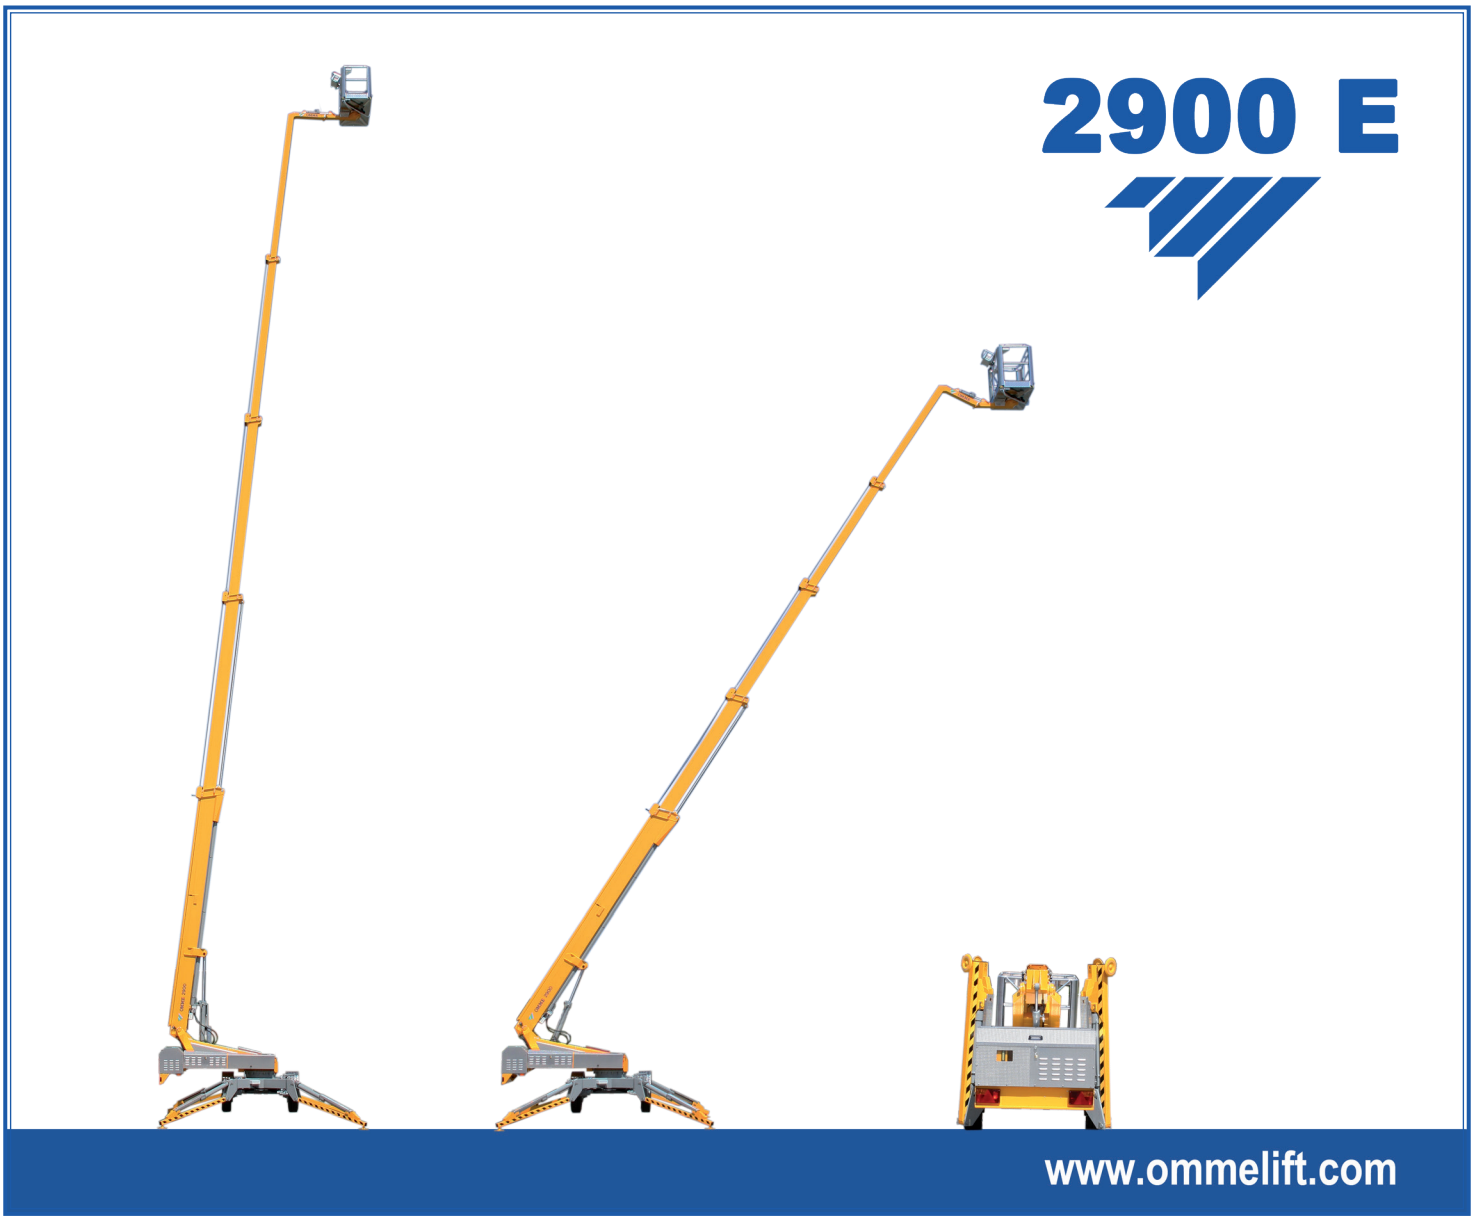


Trailer lift - Telescopic

Dealer:

KORS
HOOGWERKSYSTEMEN B.V.
Steenwijk


OMMELIFT

Built to last - *ask our users!*


Kors Hoogwerksystemen BV


Oostermeentherand 12
Steenwijk, 8332 JZ, Netherlands
+31 521 58 90 66
info@kors-hoogwerksystemen.nl
www.kors-hoogwerksystemen.nl


2900 E Trailer lift

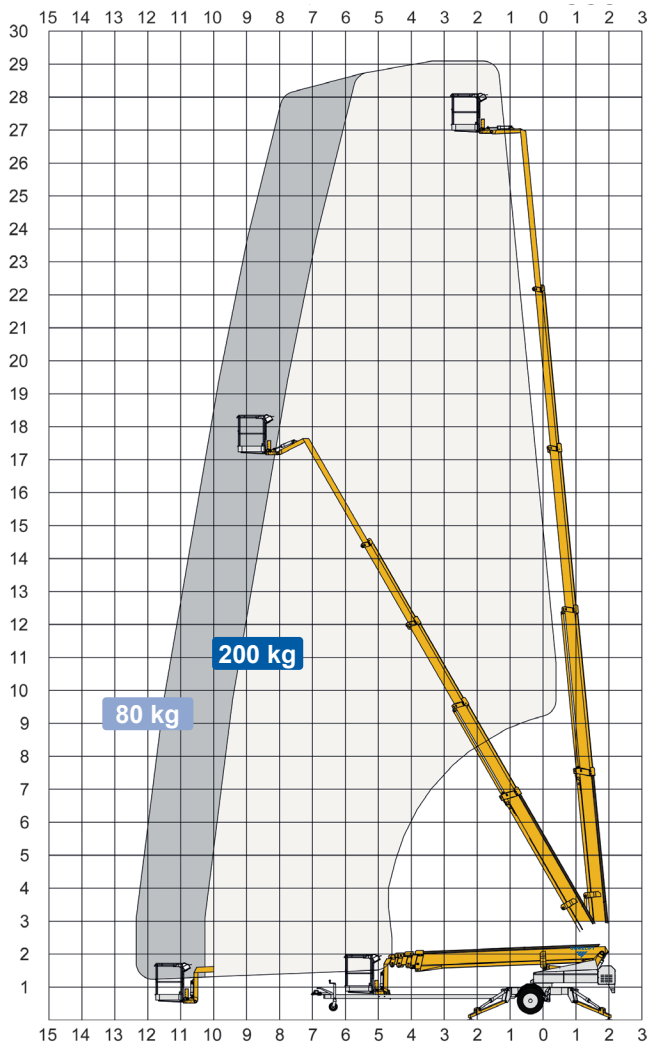

Technical Data:	2900 E	2900 EB	2900 EBD
Max. working height	29.0 m		
Max. platform height	27.0 m		
Max. outreach	12.3 m		
Up and over clearance	-		
Angle boom length (boom + basket)	2.0 m		
Jib length (jib + basket)	-		
Vertical jib rotation	-		
Turret rotation	± 355°		
Basket rotation	± 41°		
Max. basket load	200 kg		
Basket size	1.25 x 0.8 x 1.1 m		
Stabilizer pad size	ø200 mm		
[5]Petrol [6]Diesel	**230V / 16A**	**BATTERY**	**HYBRID**
Engine	[5] Optional [6]	[5] Optional [6]	[6] 14kW/18.8hp
Fuel tank capacity			16 l
Generator			24 V / 22 A
Battery pack		24V/200Ah/5h	24V/200Ah/5h
Charger		24 V / 30 A	24 V / 30 A
Double charger system		Optional	Optional
Elec. descent	Optional	Optional	Optional
See www.ommelift.com for more features and options			
Self-propulsion with hydraulic engagement of traction rollers	Standard		
Gradeability	14% / 8°		
Ground to tire clearance at max. set-up	Min. 170 mm (5.9% / 3.4°)		
Engine only version available			
Total weight	3400 kg	3400 kg	3500 kg
Ground pressure, outrigger pad	22.5 kg/cm²	22.5 kg/cm²	22.5 kg/cm²
Ground pressure with 0.4 x 0.4 m spreader plate	1.2 kg/cm²	1.2 kg/cm²	1.2 kg/cm²
Max. force, outrigger	19.1 kN	19.1 kN	19.1 kN
Hydraulic stabilizers	Standard		
Controls	Proportional		
Flush basket mount	Standard		
Elec. power outlet in basket	Standard		
Tool trays in basket	Standard		

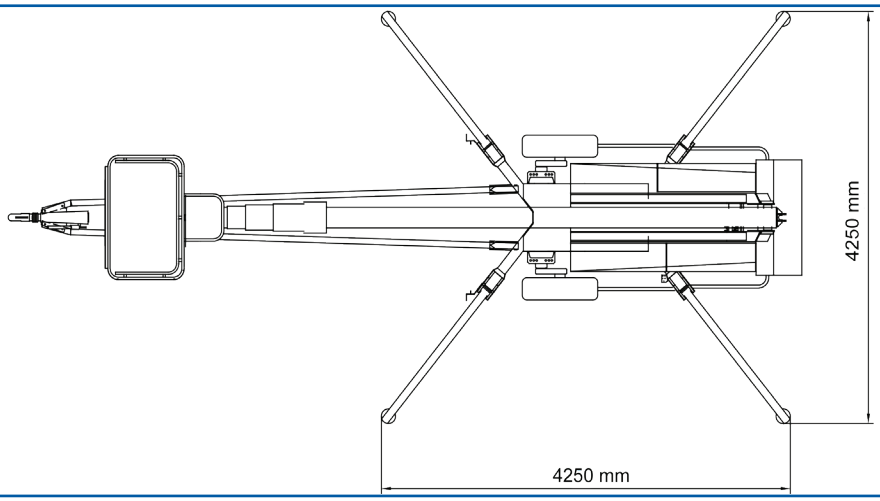

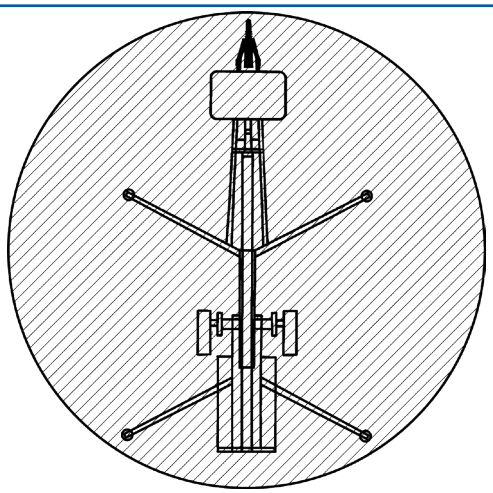

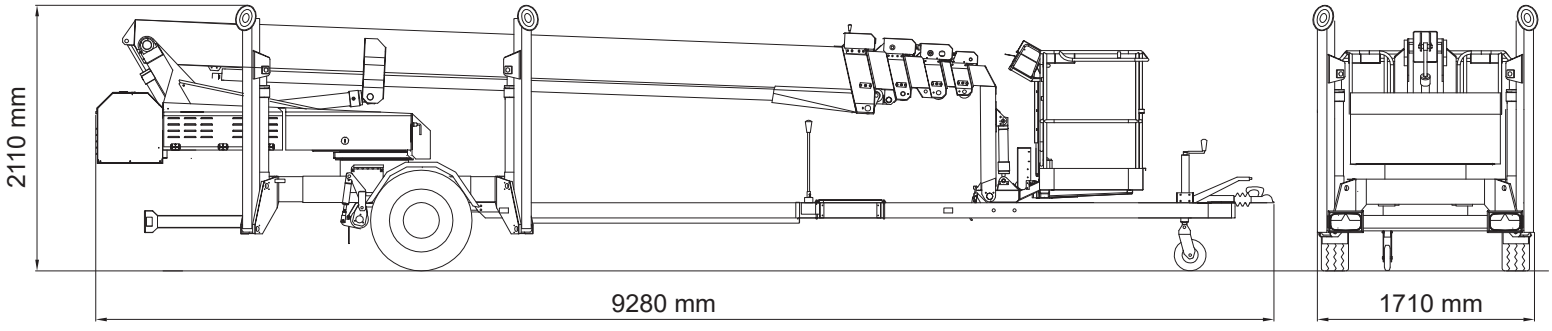

03.22 Subject to change without notice. Data, dimensions and features are indicative and not binding