



Technical Data

| Model | | AJ- 88P |
|----------------------------|-------|---------|
| Prime power | kva | 80 |
| | kw | 64 |
| Standby power | kva | 88 |
| | kw | 70 |
| Rated voltage line to line | V | 230/400 |
| Rated current | A | 115,2 |
| Maximun sound level | dB@7m | 72 |

Engine-Perkins

| | | |
|-------------------|-------|---|
| Model | | 1104A-44TG2 |
| Aspiration | | Four-stroke, water-cooled, In line, Turbo charged |
| Fuel system | | Direct injection |
| No. cylinders | | 4 |
| Displacement | L | 4,4 |
| Bore*Stroke | mm | 105x127 |
| Compression ratio | | 17.25:1 |
| Rated speed | r/min | 1500 |
| Governor | | mechanical |
| Engine size | mm | 1241x629x951 |
| Engine wet weight | kg | 463 |
| Fire order | | 1-3-4-2 |
| Start Motor | V | 12 |
| Rotation | | Anti-clockwise, viewed on the flywheel |

Air Inlet

| | |
|-----------|--------------------|
| Air inlet | mounted air filter |
|-----------|--------------------|

Fuel System

| | |
|---------------------|-------------------------|
| mechanical governor | cassette type fuel pump |
| fuel filter | Ecoplus fuel filter |

Fuel System

| | | |
|--------------------------|-----|------|
| 110% load(Standby power) | L/h | 20,5 |
| 100% load(Prime power) | L/h | 18,7 |
| 75% load(Prime power) | L/h | 14 |
| 50% load(Prime power) | L/h | 9,7 |
| Fuel capacity | L | 120 |

Lubrication System

| | | |
|--------------|---|---|
| Oil capacity | L | 8 |
|--------------|---|---|

Cooling System

| | | |
|------------------------|---|----|
| Total coolant capacity | L | 13 |
|------------------------|---|----|

Standard Features

| | |
|--|---|
| Engine(Perkins ENGINE) | ● |
| Radiator 50°C max, fans are driven by belt | ● |
| 12V charge alternator | ● |
| Alternator: single bearing alternator IP23 | ● |
| insulation class H/H | ● |
| Standard auto control system | ● |
| Main line circuit breaker / ACB | ● |
| Base fuel tank | ● |
| 12V batteries, rac and cable | ● |
| Exhaust system(Ripple flex exhaust pipe) | ● |
| Exhaust siphon, flange, muffler | ● |
| User manual | ● |
| Battery charge | ● |

Options

| | |
|--|-----------|
| Water heater | ○ |
| Alternator heater | ○ |
| One set of air filter, fuel filter, oil filter | ○ |
| PMG | ○ |
| Water oil separator | ○ |
| Daily fuel tank | ○ |
| Remote control panel | ○ |
| Automatic transfer switch/ATS | ○ |
| Switch box | ○ |
| Standard: ● | Options:○ |

Alternator

| | | |
|--------------------|-----|----------------------------|
| Model | | TAL-A44-C |
| Alternator Brand | | Leroy Somer |
| Phase | | 3 |
| Voltage | V | 230/400 |
| Wiring Type | | 12 wires |
| Bearing | | 1 |
| Power factor | | 0,8 |
| Frequency | Hz | 50 |
| Prime power | KVA | 85 |
| Exciter Type | | Brushless, self-excitation |
| Voltage regulation | % | ±0.5 |
| Protection Grade | | IP 23 |
| Insulation grade | | H |

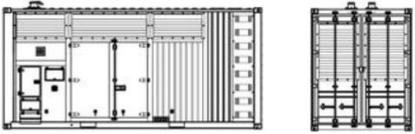
Controller-Deepsea

Model DSE 6120

7 configurable digital inputs
Built-in governor and AVR control
Base load (kW export) functionality
Mains (utility) de-coupling protection
Generator power (kW, kVA) monitoring
Overload (kW & kV Ar) protection
Emergency stop
Start failure



Unit Dimensions(Basic unit)

| | | |
|--|----|----------------|
|  | | |
| L*W*H | mm | 2550x1050x1350 |
| Weight | kg | 1.500 |

Warranty

Perkins Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours



YOUR INTERNATIONAL PARTNER FOR
NEW AND USED GENERATOR SETS