

1500 EX




www.ommelift.com

Trailer lift - Articulated

OMMELIFT

Built to last - ask our users!

1500 EX Trailer lift

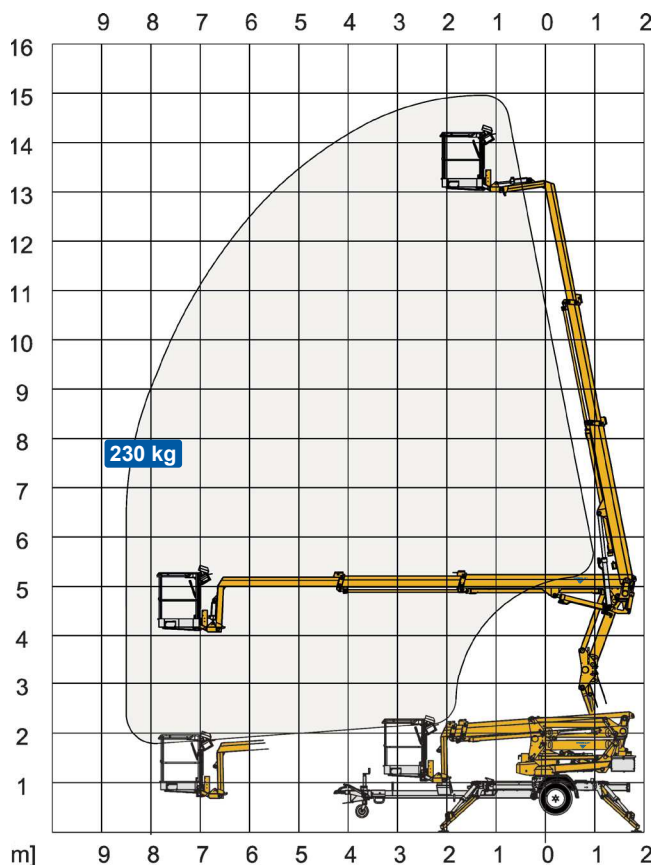

Technical Data:	1500 EX	1500 EXB	1500 EXB Lightweight
Max. working height	15.0 m		
Max. platform height	13.0 m		
Max. outreach	8.5 m		
Up and over clearance	5.0 m		
Angle boom length (boom + basket)	2.0 m		
Jib length (jib + basket)	-		
Vertical jib rotation	-		
Turret rotation	± 355°		
Basket rotation	± 50°		
Max. basket load	230 kg		
Basket size	1.25 x 0.8 x 1.1 m		
Stabilizer pad size	ø200 mm		
	⁵ Petrol ⁶ Diesel	230V / 16A	BATTERY Lithium
Engine	⁵ Option ⁶		
Fuel tank capacity			
Generator			
Battery pack		24V/120Ah/5h	24V/120Ah
Charger		24 V / 15 A	24 V / 40 A
Double charger system		Optional	Optional
Elec. descent	Optional		
See www.ommelift.com for more features and options			
Self-propulsion with hydraulic engagement of traction rollers	Standard		
Gradeability	14% / 8°		
Ground to tire clearance at max. set-up	Min. 300 mm (10.8% / 6.1°)		
Total weight	2000 kg	2050 kg	2000 kg
Ground pressure, outrigger pad	12.9 kg/cm²	12.4 kg/cm²	12.9 kg/cm²
Ground pressure with 0.4 x 0.4 m spreader plate	0.7 kg/cm²	0.7 kg/cm²	0.7 kg/cm²
Max. force, outrigger	10.5 kN	10.5 kN	10.5 kN
Hydraulic stabilizers	Standard		
Controls	2-step		
Flush basket mount	Standard		
Elec. power outlet in basket	Standard		
Tool trays in basket	Standard		

