



TEREX PEINER GmbH

Goßbillstraße 1-7 · D-54294 Trier
Telefon: ++49 (0 51) 81 00 8-0
Telefax: ++49 (0 51) 8 76 40 u. 8 93 00
Internet: <http://www.peiner.com>
e-mail: terex@peiner.com

Typenblatt Specification Sheet Fiche Technique


PEINER Schnellmontagekran Fast self erecting tower crane Grue à montage rapide

SMH 126

DIN 15018	H1 / B3
Max. Tragfähigkeit Lifting capacity Force de levage	3.0 t



"City Kran"

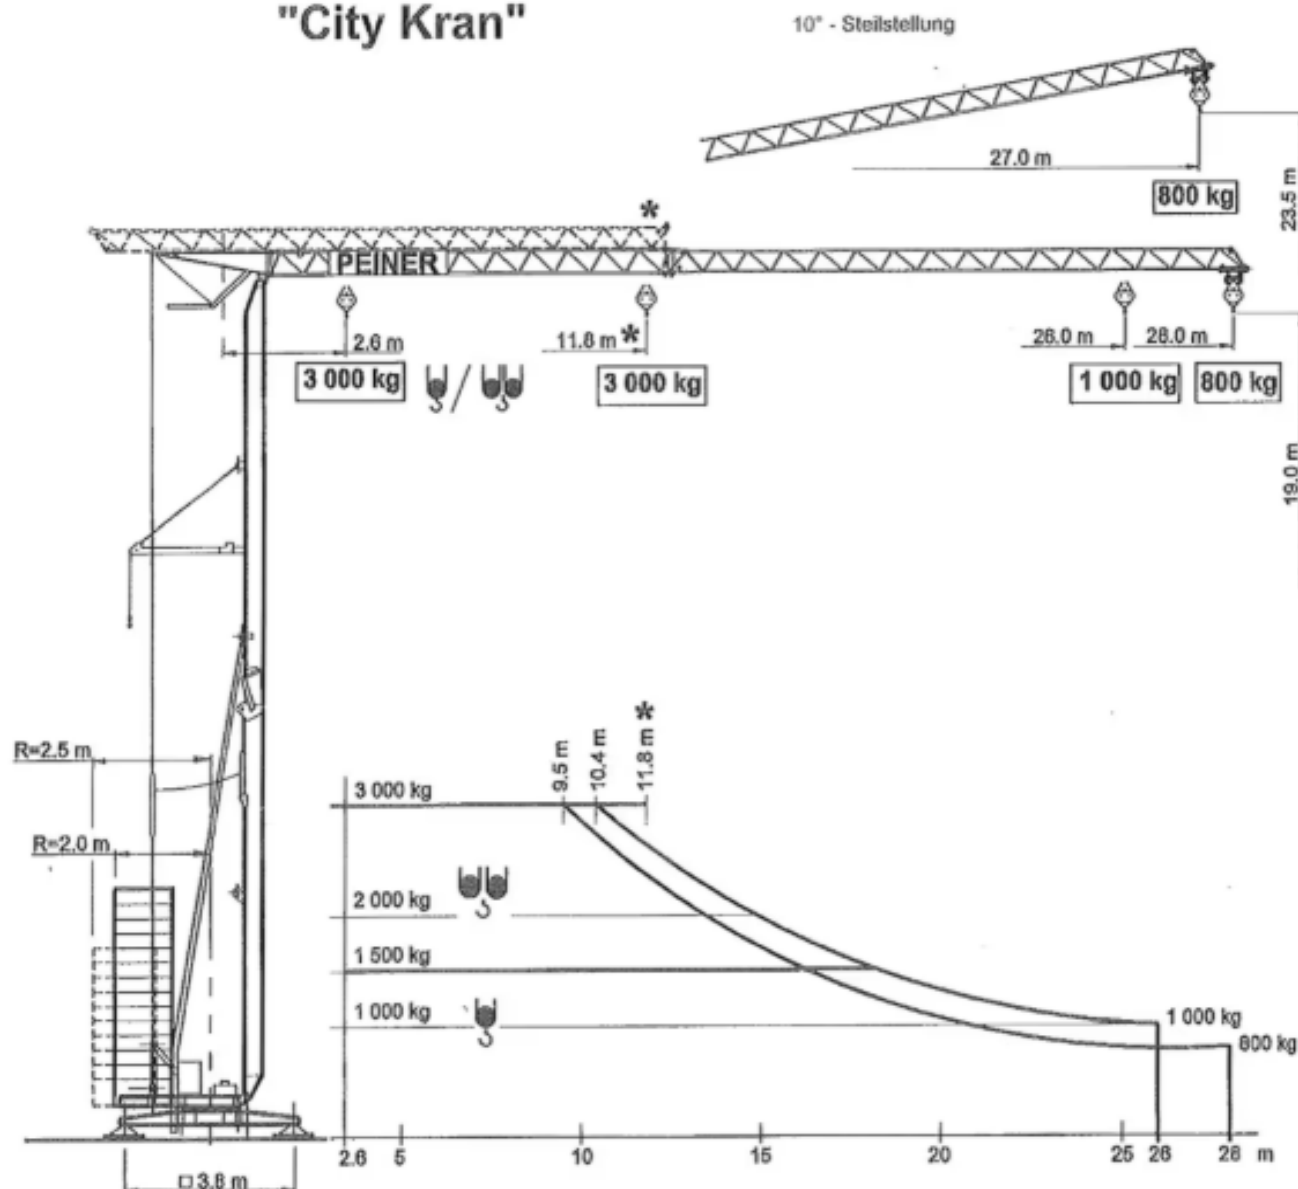

PEINER Schnellmontagekran

Fast self erecting tower crane
Grue à montage rapide

SMH 126
Form 26.5 (BGL)
City Kran

Geschwindigkeiten / Speeds / Vitesses


K 2.2-20/1		$v = 21 / 42 \text{ m / min.}$	2.2 kW	400 V
K WB 15 / 3		$v = 0.3 \rightarrow 0.9 \text{ min}^{-1}$	1.1 kW	50 Hz
Hydraulik			3.0 kW	3 Ph

PU 7-20/3 6.6 kW			40 m / min	1 000 kg		20 m / min	2 000 kg	Motorenleistung ges. ~ 12 kW Total motor output Puissance moteur
			20 m / min	1 500 kg		10 m / min	3 000 kg	
			5 m / min			2.5 m / min		
								Anschlußleistung 15 kVA Connected power Puissance installée

Gewichte und Maße / Weights and sizes / Poids et mesures

Gegengewicht Counter weight Contrepoids	kg	City 15 000	Standard 13 000	Konstruktionsgewicht Construction weight Poids de construction	kg	9 000
max. Eckdruck max. wheel load pression max. par galot	kN	180	165	Spurweite / Radstand Track gauge / wheel gauge Ecartement de voie / Empâtement	m	3.8 x 3.8
Drehradius Radius of rotation Rayon de rotation	m	2.0	2.5	Kabelquerschnitt Cable cross section Section de câble	mm ²	4 x 25

Straßentransport mit KSF / Road transport with KSF / Transporte sur route avec KSF 25 km / h

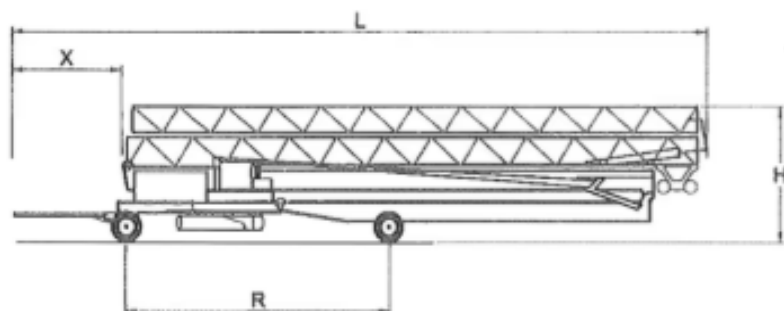

KSF 15	[m]
B	2.4
L	15.1
H	3.2
R	5.2
X	3.1

Unsere Vertretung:
Our representative:
Notre représentant: