








DPX-20061 - BES20S

ALL-IN-ONE ENERGY SYSTEM

SPECIFICATION




BES20S Battery/Solar/Diesel All-in-one Energy System				
Item	Unit	Data		
Voltage	AC V	220	230	240
Max. output power	kVA/kW	24/24	24/24	24/24
Max. current	A	109	104	100
Continuous output power	kVA/kW	20/20	20/20	20/20
Continuous current	A	91	87	83
Overload capability		110% last 10mins, 120% last 1min (SOC>30%, AT<45°C)		
Frequency	Hz	50		
Phase	P	1		
Power factor	PF	1		
Dimensions	mm	2100 x 1150 x 1700		
Dry weight	kg	1350		
40' Loading	Qty	4		
Noise level(hybrid mode)	dBA@7m	55		
Noise level(battery mode)	dBA@7m	50		
Ambient temperature		-20°C-50°C		
Power connection input		1P Socket Busbar		
Power connection output		1P Main load socket AC socket: 1P, 2x32A, 2x16A; Busbar 1P Socket		
Certification standards		     UN 38.3 IEC 62619 IEC 62477 IEC / EN 60529 EN 61000-6-1/2/3/4 AS 4777.2 G99 CE Declaration of Conformity Stage V		

The technical data is measured in standard conditions:

- Absolute atmospheric pressure: 100kPa
- Ambient temperature: 25°C
- Relative air humidity: 30%

Note: If the on-site operating environment changes, the parameters on the specification will change accordingly.

System working principle

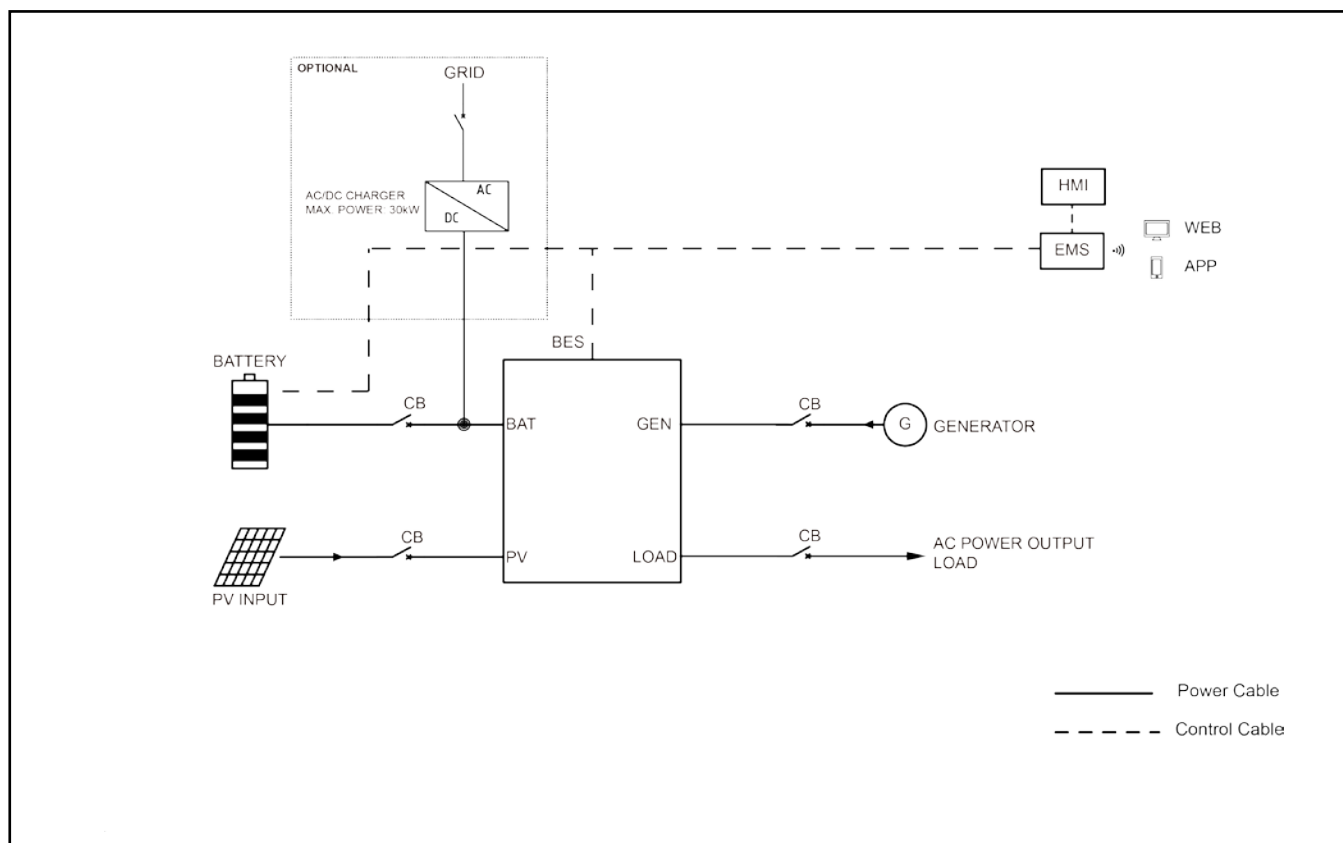

Intelligent Energy Management



DC/AC System		
Rated power	kVA/kW	20/20
Output voltage	AC V	220/230/240
Parallel / On-grid function		Parallel: <input type="checkbox"/> ; On-grid: <input checked="" type="checkbox"/>

Grid Power Input		
Rated power	kVA/kW	20/20
Phase	P	1

PV System		
MPPT rated power	kWp	18+18
Rated voltage	DC V	100-500
Solar panel voltage	DC V	22-60
Solar panel capacity	Wp	5*500

Battery System		
Battery type		LiFePO4
Battery capacity	kWh	30.7
Rated voltage	DC V	51.2
Cooling system		Liquid-cooled
Max charging rate		1C
Max discharging rate		1C
DOD (depth of discharge)		Default 80% (set via SOC)
NOTE: The discharge power decreases as the battery SOC decreases.		

Diesel Generation System		
Engine brand / mode		Yunnei / DEF20CFA4
Alternator brand		Stamford or equivalent
Rated power	kVA/kW	30/24
Rated voltage	AC V	240
Phase	P	1
Fuel tank capacity	L	100

Control System		
HMI control panel	inch	13" Touchscreen
Communication interface		WAN/WIFI/SIM
Cloud services		APP/WEB

* Data is subject to change without prior notice as new products are always developed.

Please contact your local agent with any doubts or for more information.