

XGA26K

Articulated boom lift


FEATURES

MEASUREMENTS

26.6m working height
Up to 150/256kg lift capacity

PRODUCTIVITY

2.4m x 0.9m working platform
3 entry type platform with side swing doors
160° platform rotation
4-wheel drive
Axle balance system
Platform and chassis emergency stop
Emergency power unit
Axle balance pressure detection system
4-wheel braking system

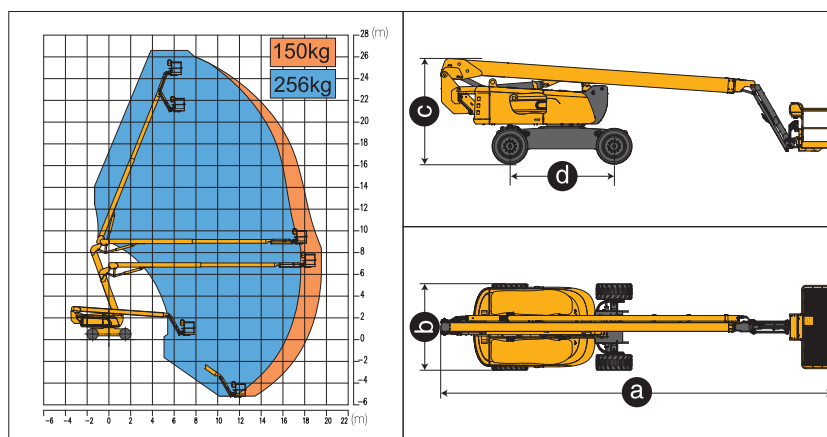

POWER

12V DC emergency power
Cold start components
Engine air pre-filter kit
Engine condition monitoring and start protection device
Kubota Euro stage V emission

OPTIONS

Tool tray
Work light assembly
Foam-filled rough terrain tires

Item	Unit	XGA26K
Working height	m	26.6
Platform height	m	24.6
Working radius	m	19.5
Lift capacity	kg	150/256
Occupant capacity	-	2
1st Boom luffing range	°	-1~+70
2nd Boom luffing range	°	-35~+68
Fly jib luffing range	°	-65~+70
Turntable rotation	°	360
Platform rotation	°	160
Drive speed (retracted/extended)	km/h	5/0.6
Turning radius (inside/outside)	m	2.2/4.4
Tailswing	mm	1330
Ground clearance	mm	380
Gradeability	%	45
Tires	-	18-625
Power source	-	Kubota V2607
Rated power	kW/(r/min)	48/(2400)
Fuel tank	L	180
Hydraulic tank	L	150
Weight	kg	18100
Platform size	mm	2400x900
a Length (transportation)	mm	11760/9900
b Width	mm	2490
c Height	mm	2950
d Wheelbase	mm	3000

SOLID TO SUCCEED