

DPX-19824

Perkins 4012-46TAG3A

in 40FT Container

Prime: 1368 KW / 1710 KVA
Standby: 1500 KW / 1880 KVA

Technical Data

Model		P1880
Prime power	kva	1710
	kw	1368
Standby power	kva	1880
	kw	1500
Rated voltage line to line	V	400
Rated current	A	2714
Maximum sound level	dB@7m	78

Engine-Perkins

Model		4012-46TAG3A
Aspiration		4 stroke, Vee 60°C, Turbo charged,
Fuel system		Direct injection
No. cylinders		12
Displacement	L	45,842
Bore*Stroke	mm	160x190
Compression ratio		13.6:1
Rated speed	r/min	1500
Governor		Electric
Engine size	mm	2731x1723x2118
Engine wet weight	kg	4604
Fire order		1a-6b-5a-2b-3a-4b-6a-1b-2a-5b-4a-3b
Start Motor	V	24
Rotation		Anti-clockwise, viewed on the flyweel

Air inlet

clear filter	mm	127
dirty filter	mm	380

Fuel system

type of injection system		Combined unit injector
Fuel delivery pump pressure	kpa	300

Fuel System

110% load(Standby power)	L/h	318
100% load(Prime power)	L/h	283
75% load(Prime power)	L/h	213
50% load(Prime power)	L/h	151
Fuel capacity for silent genset	L	2000
Fuel capacity for open genset	L	2000

Lubrication System

Oil capacity	L	177
--------------	---	-----

Cooling System

Total coolant capacity	L	201
------------------------	---	-----

Standard Features

Engine(Perkins ENGINE)	●
Radiator 50°C max,fans are driven by belt	●
24V charge alternator	●
Alternator: single bearing alternator IP23	●
insulation class H/H	●
Standard auto control system	●
Main line circuit breaker / ACB	●
Base fuel tank	●
24V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe)	●
Exhaust siphon, flange, muffler	●
User manual	●
Battery charge	●
Water heater	●

Options

Alternator heater	○
One set of air filter, fuel filter, oil filter	○
PMG	○
Water oil separator	○
Daily fuel tank	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○

Standard: ● Options:○

Alternator

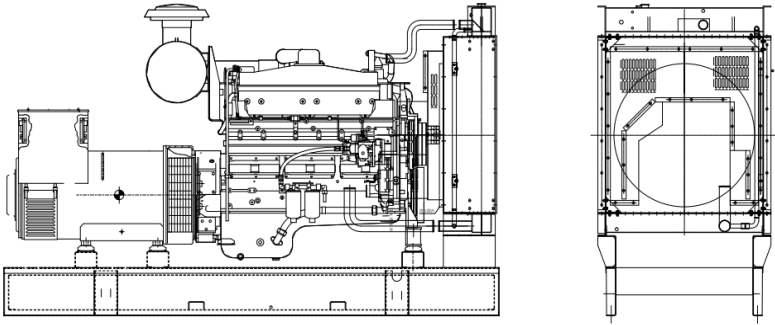
Model		LSA52.3 S5
Alternator Brand		Leroy Somer
Phase		3
Voltage	V	400
Wiring Type		6 wires
Bearing		1
Power factor		0,8
Frequency	Hz	50
Prime power	KVA	1841
Exciter Type		Brushless, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H

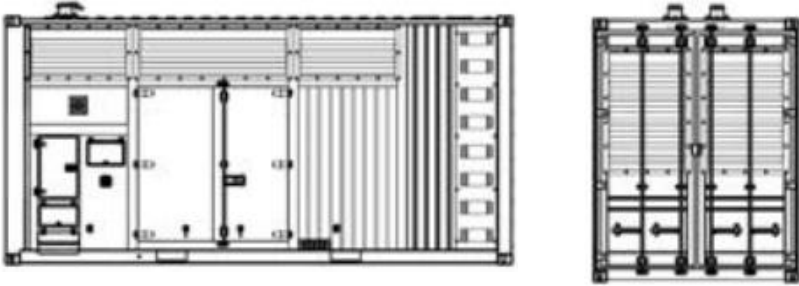
Controller-Deepsea

Model	DSE 8610
7 configurable digital inputs&Synchro use	
Built-in governor and AVR control	
Base load (kW export) functionality	
Mains (utility) de-coupling protection	
Generator power (kW, kVA) monitoring	
Overload (kW & kV Ar) protection	
Emergency stop	
Start failure	



Unit Dimensions(Basic unit)

		
Open Type		
L*W*H	mm	5000*2164*2550
Weight	kg	12150

		
Silent Type		
L*W*H	mm	12192x2438x2896
Weight	kg	20560

Warranty

Perkins Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours

(whichever comes first).