


TH




3.6

PRELIMINARY

Load chart on tyres

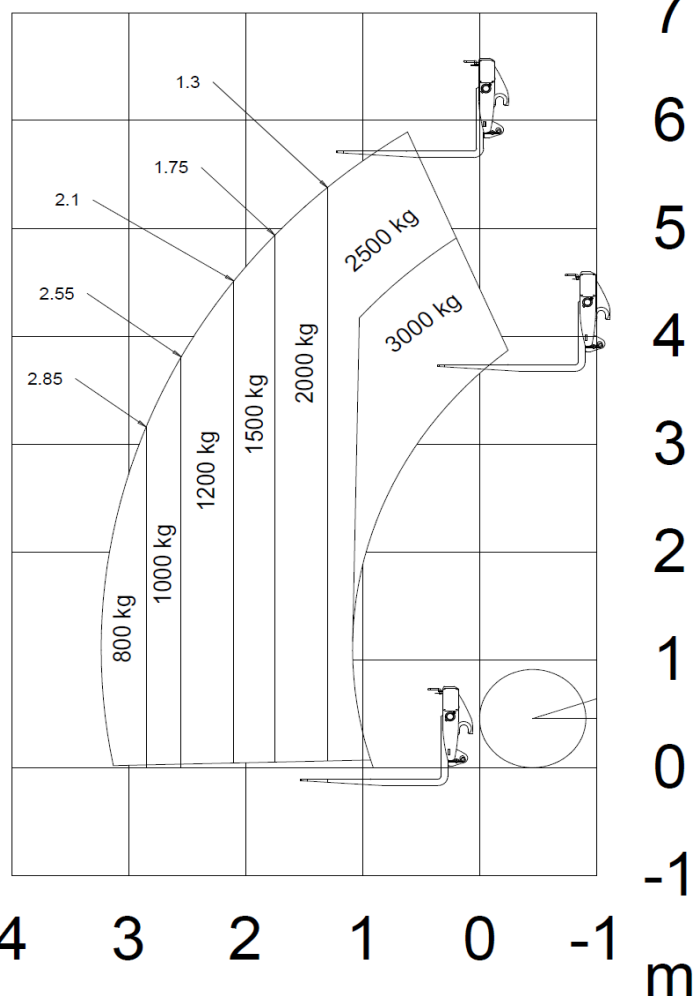

7
6
5
4
3
2
1
0
-1
m

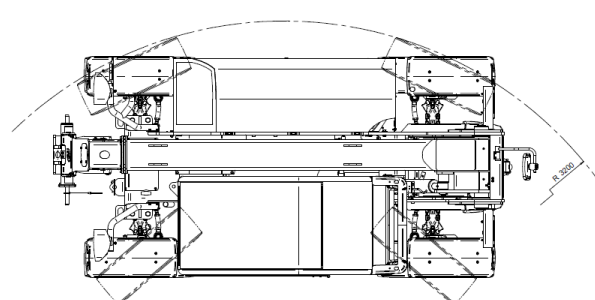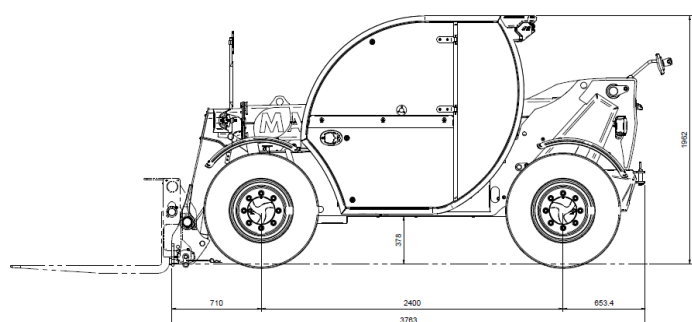

The data in this brochure are informative and subject to change without notice.
All Pictures shown are for illustration purpose only. Actual product may vary.

MAGNI
TELESCOPIC HANDLERS

TH 3.6

PRELIMINARY

Machine model	Telescopic handler	TH 3.6
	Maximum lifting capacity	3.000 kg / 6,600 lbs
	Maximum lifting height	5,87 m / 19' 3"
	Maximum reach	3,14 m / 10' 3"
Engine	Type	Kubota V3307 Stage V
	Rated Power	55,4 kW (75 hp)
	Maximum torque	310 Nm @ 1,400 rpm
	Displacement	3,33 l
	Cylinders	4
	Automatic radiator cleaning	Standard
Transmission	Type	Hydrostatic
	Gearbox	1 speed forward-reverse
Brakes and Tyres	Service brake	Wet multi-disk brakes on front axle
	Parking brake	Front + Automatic
	Tyre sizes	300/75 R18
Performance	Max. travel speed	35 km/h
	Drawbar pull	39 kN
	Traction	4WD
Weight & Dimensions	Total weight unladen	5,000 kg / 11,023 lbs
	Ground clearance	378 mm / 14,8"
	Wheelbase	2400 mm / 7' 10"
	Width	1810 mm / 5' 11"
	Cab width	811 mm / 2' 9"
	Height	1962 mm / 6' 5"
	Lenght	3763 mm / 12' 4"
	Tilting back	12°
	Tilting forward	118°
Hydraulic circuit for movements	Circuit type	Gears
	Max. hydraulic capacity	89 l/min
	Max. working pressure	255 bar
Tank and system capacities	Hydraulic fluid	90 l / 24 US gal
	Diesel fuel tank	67 l / 17.7 US gal