

5040 Technical specifications

Operating data

| | |
|------------------|---------------------|
| Bucket capacity | 0.36 m ³ |
| Operating weight | 2,070 kg |

Engine / Motor

| | |
|-------------------------------------|-----------------|
| Engine / Motor manufacturer | Yanmar 3TNV86CT |
| Engine performance | 28.5 kW |
| Emission standards stage (standard) | V |

Power transmission

| | |
|----------------------------|---|
| Traction drive | hydrostatic drive system |
| Travel speed | 20 km/h |
| Standard tires | 27x10.5-15 - construction machine tread |
| Differential lock (Option) | hydraulic (optional) |
| Max. steering angle | 2 x 38 ° |

Steering and operating hydraulics

| | |
|-----------------------------------|----------|
| Max. pump discharge capacity | 30 l/min |
| Max. pump pressure | 240 bar |
| Max. Powerflow discharge capacity | 60 l/min |


Kinematics

| | |
|---------------------|----------|
| Tipping load Bucket | 1,400 kg |
| Tipping load Bucket | 1,400 kg |
| Payload (S=1.25) | 900 kg |
| Tilt-in angle | 40 ° |
| Tip-out angle | 43 ° |

Filling capacities

| | |
|-----------|------|
| Fuel tank | 48 l |
|-----------|------|

5040 Dimensions

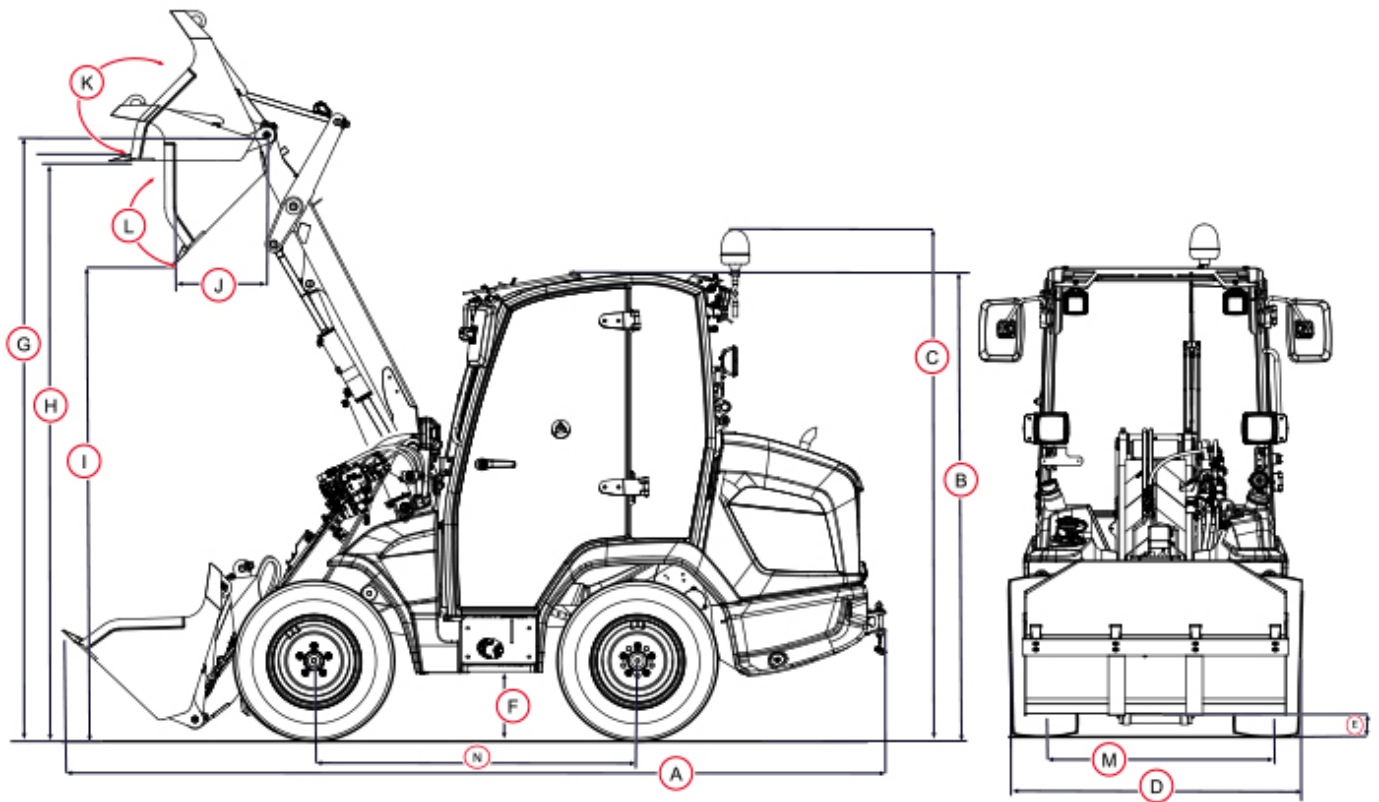

| | | |
|---|-------------------------|----------|
| B | Height | 2,170 mm |
| A | Length | 4,090 mm |
| D | Width | 1,260 mm |
| G | Bucket pivot point | 2,800 mm |
| H | Overhead loading height | 2,680 mm |
| I | Dumping height | 2,260 mm |
| | Stack height | 2,630 mm |

Please note: that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2022 Kramer-Werke GmbH.