

## HA16 E HA16 E PRO



### BOOST YOUR PRODUCTIVITY

- > Load capacity of 300kg and 5° tilt
- > Oscillating axle with manual differential lock increases ground traction (PRO model)
- > 4-wheel steering for more agility (PRO model)

### OPERATE ANYTIME ANYWHERE WITH ZERO EMISSION

- > Full electric drive
- > Silent and clean operations
- > Versatile use: indoor / outdoor on all types of worksites

### EXTEND YOUR DUTY CYCLES

- > Multiple and fast charging solutions adapted to all worksite situations
- > Fast charging thanks to removable Range Extender (option compatible with other PULSEO machines)

### WORK SAFELY


- > Haulotte Activ'Shield Bar : anti-crushing system (standard PRO model)
- > Haulotte Activ'Lighting System: load and unload the machine in low visibility conditions (standard PRO model)
- > Transport handle to ensure the operator is safe while loading and unloading (optional)

# HA16 E HA16 E PRO

## ARTICULATING BOOMS ELECTRIC

### TECHNICAL DATA

|                                     | HA16 E                            | HA16 E PRO |
|-------------------------------------|-----------------------------------|------------|
| Working height                      | 16 m                              |            |
| Platform height                     | 14 m                              |            |
| Horizontal outreach                 | 7.94 m                            |            |
| Up and over clearance               | 7.88 m                            |            |
| Lift capacity                       | 300 kg                            |            |
| <b>A</b> Length                     | 6.78 m                            |            |
| Length - transport                  | 5.79 m                            |            |
| <b>B</b> Width                      | 2.3 m                             |            |
| <b>C</b> Height - stowed            | 2.29 m                            |            |
| Height - transport                  | 3 m                               |            |
| <b>D</b> Wheelbase                  | 2.1 m                             |            |
| <b>E</b> Ground clearance           | 30 cm                             |            |
| <b>F</b> x <b>G</b> Platform size   | 1.8 x 0.8 m (Option 2.40 x 0.9 m) |            |
| <b>H</b> Storage / transport length | 5.79 m                            |            |
| Storage / transport height          | 3 m                               |            |
| Tailswing                           | 16.2 cm                           |            |
| Tilt                                | 5 °                               |            |
| Proportional drive speed            | 4,9 km/h                          |            |
| Maximum wind speed rating           | 45 km/h                           |            |
| Gradeability                        | 40 %                              |            |
| Turning radius - outside            | 5 m                               | 3.3 m      |
| Weight                              | 7 030 kg                          | 7 120 kg   |
| Batteries                           | 48V - 390Ah (C20)                 |            |

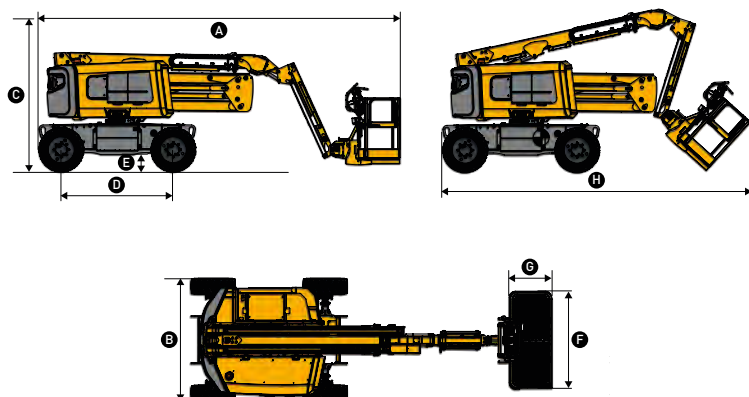

### STANDARD EQUIPMENT

- > Haulotte Activ'Lighting System (standard PRO model)
- > Proportional and simultaneous movements
- > Modular basket 1.8 x 0.8 m
- > Access to the MyHaulotte multi-service portal
- > Universal telematic plug
- > 4-wheel drive and 2-wheel steering (standard E model)
- > 4-wheel drive and 4-wheel steering (standard PRO model)
- > Haulotte Activ'Screen
- > Haulotte Activ'Shield Bar (standard PRO model)
- > Flashing light

### OPTIONS & ACCESSORIES

- > Non-marking tires
- > USB plug
- > Glazier kit
- > Sherpal telematics subscription
- > 360° continuous rotation (PRO model only)
- > Range Extender protective cover
- > Large basket 2.44 x 0.91 m
- > Transport handle
- > REX 5.5 kW - Stage 5
- > Accelerated charger 380V

