ZOWLION TELESCOPIC BOOM LIFT ZT32J-V

Comply with CE/ANSI/CSA Standard



Accessories & Options

▶ Platform work light

Tilt protection system

Load sensing system
Swing-out engine tray

Oscillating axle

- ► Anti-collision device
- ▶ AC power to platform




ACCESS WITH ZOOMLION GREEN


Phone: 0086(731)-88353692 Add: 701 Xulor E-mail: awp@zoomlion.com Web: www.zoo


Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China Web: www.zoomlion-access.com

ZOOMLION

| Model | ZT | 32J-V |
|--|---|-----------|
| | Imperial | Metric |
| Size | | |
| Work Height | 112ft 6in | 34.3m |
| Platform Height | 105ft 11in | 32.3m |
| Horizontal Outreach | 62ft 11in | 19.2m |
| A - Stowed Length | 42ft 11in | 12.9m |
| B - Stowed Width | 8ft 2in | 2.49m |
| C - Stowed Height | 9ft | 2.75m |
| D - Platform Length | 8ft | 2.44m |
| E - Platform Width | 3ft | 0.91m |
| F - Wheelbase | 9ft 2in | 2.8m |
| Tread | 8ft 2in | 2.49m |
| G - Ground Clearance | 1ft 4in | 0.41m |
| Performance | | |
| Platform Capacity (Unrestricted/Restricted) | 660/1000lb | 300/454kg |
| Drive Speed (Stowed) | 3.42mph | 5.5km/h |
| Gradeability | 45% (24°) | |
| Turning Radius (Inside) | 11ft 6in | 3.5m |
| Turning Radius (Outside) | 20ft | 6.1m |
| Turntable Swing | 360° continuous | |
| Platform Rotation | ±90° | |
| Tail Swing | 5ft | 1.52m |
| Jib (Range of Articulation) | 130° (- 55°~75°) | |
| Max. Wind Speed | 28mph | 12.5m/s |
| Power | | |
| Engine | Kubota V2607(Euro StageV) Kubota V3307(China Stage III) Weichai WP2.3NG75(China Stage IV) | |
| Fuel Tank Capacity | 39.6 (us gal) | 150L |
| Control Voltage | 12V DC | |
| Hydraulic Tank Capacity | 39.6 (us gal) | 150L |
| Drive Mode | 4WD | |
| Steering Mode | Front-wheel | |
| Tire | | |
| Туре | Solid tire Foam-filled tire | |
| Weight | | |
| Gross | 39816lb | 18060kg |





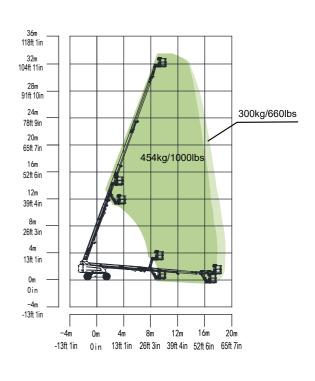

Range of Motion ZT32J-V