

ELEVAH[®] 40 MOVE

ELEVAH 40 MOVE

SELF PROPELLED ON THE GROUND



The **self-propelled** platform Elevah 40 MOVE is compact, nimble, easy to be driven, but above all safe.

NEW LOAD SYSTEM.
PATENTED.
(See cod. 40 CAR.1 and
40 CR on p.51)



WORK IN SAFETY

It is compact, agile and easy to drive but above all it is safe.



IDEAL IN TIGHT SPACES
Thanks to its incredible dimensions (99.5 x 99.5 cm), Elevah 40 Move is at its best in tight spaces.






ELEVAH[®] 40 MOVE

TECHNICAL DATA

ELEVAH 40 MOVE

Max. working height		4,00 m
Max capacity		150 kg
Number of people		1
Use		internal
A	Closed machine height	1550 mm
B	Minimum platform height	300 mm
C	Maximum platform height	1930 mm
D/E/F	Base overall dimensions	995 / 960 / 740 mm
G/H	Cage dimensions	680 x 740 mm
Machine weight		184 kg
Drive steering wheels dimensions		Ø 190 x 60
Swivel wheels dimensions (fixed)		Ø 150 x 45

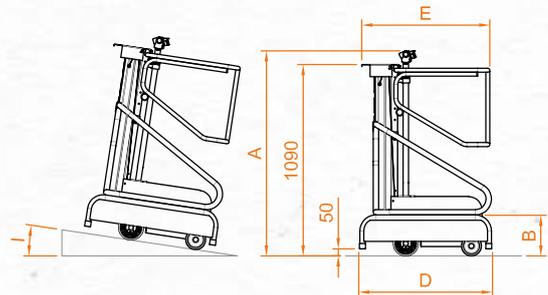


PERFORMANCE

Power supply		electrical
Batteries		2 AGM 12V 35 Ah*
Battery charger		110V - 220V
H	Maximum climbing ability	15%
Internal turning radius		0
External turning radius		800 mm
Max. speed (rising – descending)		0,10 - 0,16 m/s
Velocità massima di traslazione		1,3 m/s
Work cycles ** (with fresh batteries)		Ca. 100

* OPTIONAL: 40BGM

** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height.

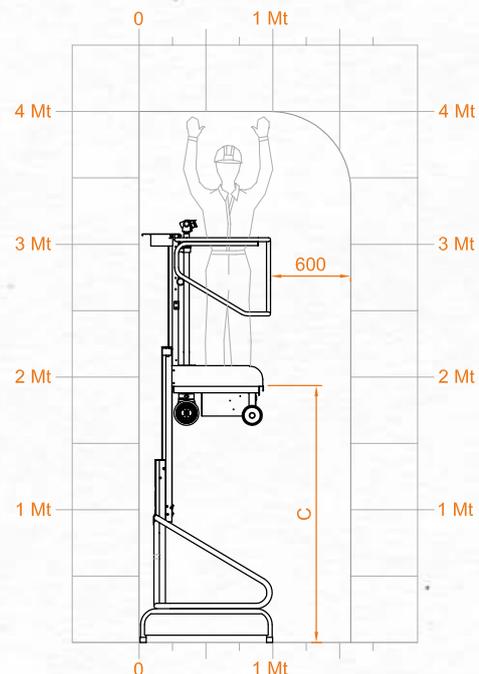

The machine can work at temperatures between -15° C and +40 °C

TECHNICAL DATA

