

**IN  
OUT**

# MJP11.5AC

**Vertical mast lift**

## LIST OF STANDARD EQUIPMENT

- Proportional controls
- Pothole protection
- Self-locking door on the platform
- Permissible side-shift at maximum height
- Platform horizontal outreach
- Non-marking tyres
- Two-wheel steering
- Two-wheel drive
- Automatic braking system
- Emergency lowering
- Emergency stop button
- Onboard diagnostics system
- Tilt indicator with alarm
- Movement alarm sensor
- Horn
- Counter Hour
- Charger protection
- Flashing beacon
- Swing-out carter for easy maintenance
- 345° turret rotation
- 3 m orizontal extention
- Explosion-proof tubing system
- Platform load sense system
- Drive enable system
- Charging indicator
- Manual brake release
- Tie-down and lifting points
- Integrated holes for fork transport

**LOGISTICS****CONSTRUCTION**

## MJP11.5AC



Load capacity		200 kg
Max no. occupants		2/1
Working height		11.2 m
Max platform height		9.2 m
Max horizontal outreach		3 m
Up and over height		7.89 m
Overall length	A	2.62 m
Overall width	B	1 m
Overall height	H	1.99 m
Platform size (length/width)		0.62 m x 0.87 m
Ground clearance (stowed)		0.07 m
Ground clearance (raised)		0.02 m
Wheelbase	C	1.22 m
Turning radius (inside/outside)		0 / 1.80 m
Turret rotation		345°
Jib movement		+70°/-60°
Drive motor		24 V / 1.5 kW
Lifting motor		24 V / 3 kW
Travel speed (stowed)		4.5 km/h
Travel speed (rated)		0.5 km/h
Up\Down Speed		95 / 50 sec
Batteries		24 V / 240 Ah AGM batteries maintenance free
Integrated charger		24 V / 30 A
Gradeability		25%
Maximum working slope (indoor use)		2,5° / 2,5°
Non-marking tyres		381x127 mm
Weight		2,950 kg



Pothole protection



Integrated holes for fork transport

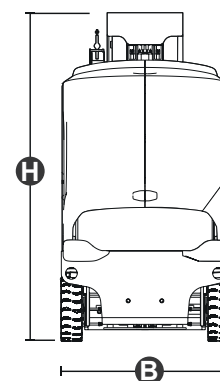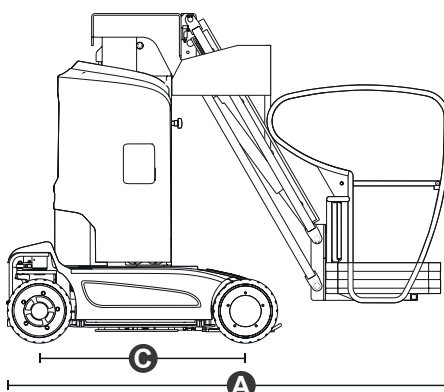

### STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.