

950

Wheel Loaders 0.7 - 0.95 m³



The particularly economic class of wheel loaders

Compact and manoeuvrable wheel loaders for a variety of applications. With an optimised power to weight ratio, low shipping weight and continuous high payload, the efficiency of this model series is of great benefit to end users.

- One-piece frame and all-wheel steering
- Hydraulic quick coupler system and parallel-controlled loading system
- Spacious cabin with perfect all-round visibility
- Efficient drive and low operating costs

950

Wheel Loaders 0.7 - 0.95 m³

Technical specifications

Operating data

Bucket capacity (standard bucket)	0,95 m ³
Operating weight	4.700 kg

Engine / Motor

Engine / Motor manufacturer	Deutz
Engine performance	55 kW

Power transmission

Travel speed	20 km/h
Travel speed (optional)	30 km/h
Differential lock	100% connectable
Standard tires	14.5-20

Steering and operating hydraulics


Flow rate (pump)	71 l/min
Pressure (maximum)	210 bar

Kinematics

Tipping load (with bucket)	3.420 kg
Payload (S=1.25)	2.100 kg

Additional technical data is available in the detailed brochure in the informational material section

Dimensions

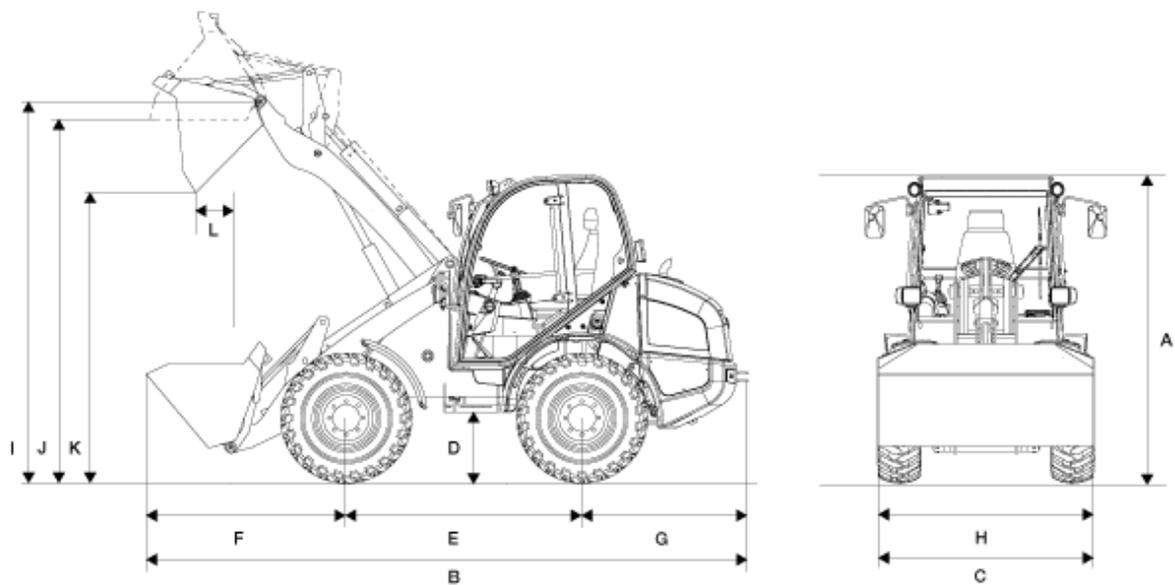

A	Height	2.650 mm
B	Length	5.360 mm
C	Width	1.890 mm
D	Ground clearance	325 mm
E	Wheelbase	2.050 mm
F	Center of front axle to tip of teeth	1.880 mm
G	Center of rear axle to end of vehicle	1.430 mm
H	Bucket width	1.950 mm
I	Bucket pivot point	3.270 mm
J	Overhead loading height	3.120 mm
K	Dumping height	2.520 mm
L	Dump reach	750 mm
	Stack height	3.010 mm

Turning radius (over tyres)

2.780 mm

Information on suitable accessories can be found on our website.

The right to make changes is reserved in the interests of ongoing further developments. You can find more information on the engine power in the operator's manual. The actual power output figures may vary due to specific operating conditions.

Information on suitable accessories can be found on our website. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations. Copyright © 2014 Kramer-Werke GmbH.