
GRIZZLY M450e-900 FORESTRY MULCHER FOR EXCAVATORS

The excavator mulcher Grizzly M450e-900 with a working width of 900 mm (35.4 in) is a compact forestry mulcher for excavators in the 6-12 t class with a volume flow of 16.6–45 gpm (63–170 l/min).



Wear-resistant skids and bolted liners provide additional protection for the housing

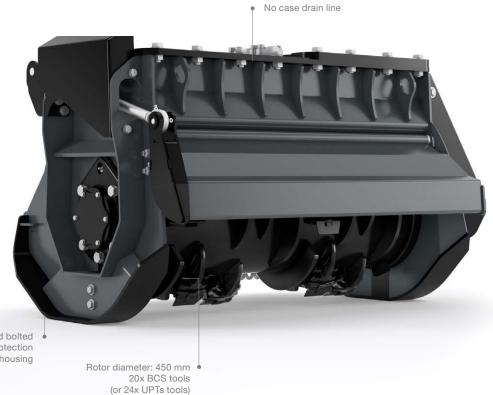

ROBUST HOUSING

Wear-resistant skids and bolted liners protect the housing and increase the lifetime.



PROTECTION FLAP

The hydraulic flap provides additional protection when mulching.



PROVEN ROTOR TECHNOLOGY

Proven rotor technology with various BCS or UPTs tools possible, for the best mulching result.



COMPACT AND POWERFUL

The mulcher is perfect for mulching trees and brush. Applications include forestry, maintaining roadsides, green areas and commercial and residential properties.



BENEFITS

- Counter blades prevent the entry of too large of material and the blocking of the rotor through additional shredding.
- Available with or without flap, hydraulically controlled.
- Four hydraulic motor options (30, 40, 45, 73 cc) to cover the entire volume flow range.
- No case drain line required, so the machine can be easily attached to any excavator without additional modifications.
- The hoses to the cylinder are protected in the housing.

TECHNICAL DATA GRIZZLY M450e-900

Working width	35.4 in (900 mm)
Total width	48.9 in / 1,241 mm (30, 40, 45 cc) and 50.3 in / 1,278 mm (73 cc)
Weight*	1,058 lbs (480 kg)
Rotor diameter	17.7 in (450 mm)
Volume flow	16.6–45 gpm (63–170 l/min)
Tools	20x BCS or 24x UPTs
Heigh (with flap)	27.6 in (700 mm)
Depth (with flap)	30.3 in (770 mm)

* Weight depends on the configuration of the machine

Prinoth GmbH Im Branden 15 88634 Herdwangen Germany Tel. +49 7557 92120 prinoth.germany@prinoth.com Prinoth AG
Brennerstraße 34
39049 Sterzing
Italy
Tel. +39 0472 72 26 22
prinoth@prinoth.com

