



RXS-T(L)

CRAWLER SCISSOR LIFTS



- ▶ Robust, but low in weight
- ▶ Operating heights: 6,6 ~ 13,8 meter
- ▶ Capacity: 200 ~ 550 kg
- ▶ Proportional control



- ✓ Full electric
- ✓ Silent, clean and sustainable work

**ROBUSTNESS
HAS A NAME**

MAIN SPECS

Motor drive	Full electric (24 V.)
Batteries	AGM (maintenance-free)
Charger	230 V. (built-in)
Tracks	Non-marking, rubber or steel with trackpads
Control	Proportional joystick controller
TL-models	Self-leveling hydraulic outriggers



STANDARD CHARACTERISTICS

- ▶ Fully electric driven
- ▶ Equipped with maintenance-free AGM batteries
- ▶ Proportional steering for sophisticated maneuvering
- ▶ Non-marking rubber tracks of – trackpads
- ▶ Automatic pothole guards
- ▶ Overload and lowering protection
- ▶ Motion, lowering safety alarm and horn
- ▶ Dual flashing warning lights
- ▶ Platform and ground emergency stop buttons
- ▶ Manual emergency lowering
- ▶ AC-power supply on platform
- ▶ Built-in charger with charge protection
- ▶ Intelligent self-diagnostic system for quick troubleshooting
- ▶ Automatic braking system
- ▶ Manual braking release
- ▶ Self-lubricating bearings
- ▶ Foldable guardrails
- ▶ Half-height swing gate/platform door
- ▶ Forklift pockets

AVAILABLE OPTIONS

Self-leveling hydraulic outriggers

Air line to platform

Foot pedal switch


Pipe cradle pair

Full-height swing gate/platform door

Color customizable as desired



MODEL	RXS0507T	RXS0610T	RXS0610TL	RXS0614TL	RXS0814TL	RXS1014TL	RXS1214TL
With hydraulic outriggers	No	No	Yes	Yes	Yes	Yes	Yes
DIMENSIONS							
Max. working height	6.6 m	8.0 m	8.0 m	8.0 m	9.9 m	11.8 m	13.8 m
A Max. platform height	4.6 m	6.0 m	6.0 m	6.0 m	7.9 m	9.8 m	11.8 m
B Overall length (stowed)	1.53 m	2.08 m	2.27 m	2.62 m	2.62 m	2.62 m	2.62 m
C Overall width	0.83 m	0.96 m	0.98 m	1.61 m	1.61 m	1.61 m	1.61 m
D Overall height (guardrails unfolded)	2.07 m	2.14 m	2.14 m	2.29 m	2.41 m	2.55 m	2.67 m
Overall height (guardrails folded)	1.53 m	1.67 m	1.67 m	1.77 m	1.89 m	2.04 m	2.15 m
E Platform length (stowed)	1.32m	1.80 m	1.80 m	2.25 m	2.25 m	2.25 m	2.25 m
Max horizontal reach (extension)	0.56 m	0.89 m	0.89 m	0.9 m	0.9 m	0.9 m	0.9 m
F Platform width	0.76m	0.78 m	0.78 m	1.16 m	1.16 m	1.16 m	1.16 m
G Ground clearance	0.1 m	0.145 m	0.145 m	0.15 m	0.15 m	0.15 m	0.15 m
WEIGHT							
Overall weight	925 kg	1620 kg	1780 kg	3335 kg	3510 kg	3800 kg	4100 kg
PERFORMANCE							
Max. platform occupancy (inside)	1 pers.	2 pers.	2 pers.	3 pers.	3 pers.	3 pers.	3 pers.
Max. platform occupancy (outside)	0 pers.	1 pers.	2/1 pers.	3 pers.	3 pers.	3 pers.	3 pers.
Lift capacity	200 kg	200 kg	200 kg	—	—	—	—
Lift capacity (outriggers deployed)	—	—	230 kg	550 kg	460 kg	320 kg	320 kg
Lift capacity (extension deck)	115 kg	120 kg	120 kg	120 kg	120 kg	120 kg	120 kg
Driving height	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Driving speed (stowed)	0-1.8 km/h	0-2.0km/h	0-2.0 km/h	0-1.8 km/h	0-1.8 km/h	0-1.8 km/h	0-1.8 km/h
Gradeability	30%	30%	30%	30%	30%	30%	30%
Turning radius (inside)	0	0	0	0	0	0	0
Turning radius (outside)	0	0	0	0	0	0	0
Maximum working inclination angle	1.7°/1.7°	1.5°/2°	1.5°/2°	0-0.5°/0-0.5°	0-0.5°/0-0.5°	0-0.5°/0-0.5°	0-0.5°/0-0.5°
Longitudinal levelling	—	—	+/- 10.37°	+/- 10°	+/- 10°	+/- 10°	+/- 10°
Lateral levelling	—	—	+/- 19.17°	+/- 15°	+/- 15°	+/- 15°	+/- 15°
Rise/lower speed	25/25 sec.	38/28S ±2 sec.	38/28S ±2 sec.	28-32s/28-32s	53-57s/49-53s	56-60s/46-50s	68-72s/68-72s
Track width	150 mm	180 mm	180 mm	300 mm	300 mm	300 mm	300 mm
POWER							
Batteries	2*12V/115Ah	4*12V/115Ah	4*12V/115Ah	8*6V/220Ah	8*6V/220Ah	8*6V/220Ah	8*6V/220Ah
Charger	100-240V/15A	90-240V/36A	90-240V/36A	100-240V/36A	100-240V/36A	100-240V/36A	100-240V/36A

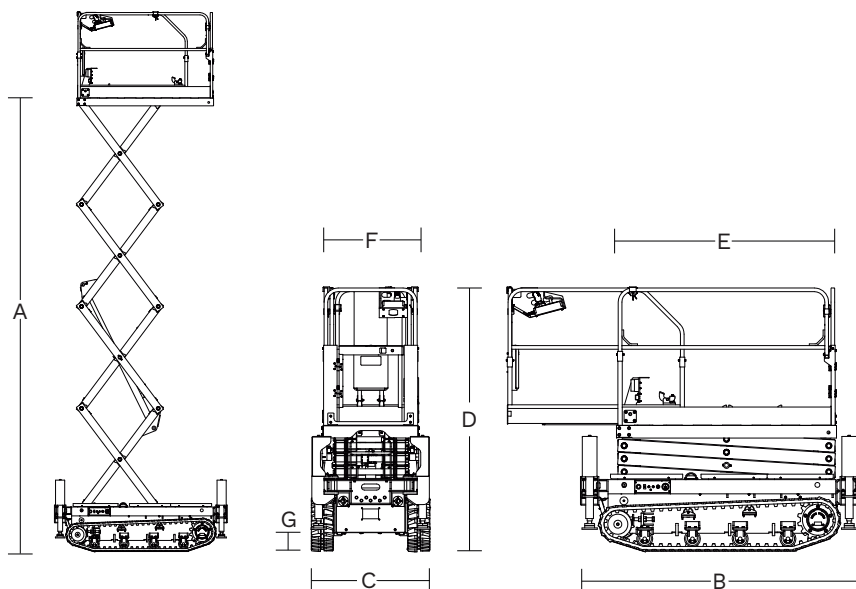

FULL ELECTRIC

- ✓ Ready for a green future
- ✓ Silent, clean and sustainable work

Get informed about the possibilities.



**ROBUSTNESS
HAS A NAME**



Rhinox is building a new generation of aerial work platforms based on years of experience in AWP's and other hoisting equipment. The machines are built using carefully selected materials. They are easy to operate, strong and compact.



QUOTATION

Interested in a Rhinox aerial work platform? Then request a quote now and receive a response today.

- ▶ Strong and compact machines
- ▶ Available from stock
- ▶ Easy to operate and versatile
- ▶ Build using certified materials
- ▶ Applied with CE certification
- ▶ Excellent service and support

 **RHINOX B.V.**

Nijverheidsplein 2, 3771 MR Barneveld

www.rhinox-lift.com

sales@rhinox-lift.com

+31 (0)85 086 9600

**ROBUSTNESS
HAS A NAME**