

ES0607OF




Load capacity		240 kg
Load capacity when extended		100 kg
Max no. Occupants (Indoor/outdoor)		2/1
Working height	A	5.60 m
Platform floor level height	B	3.60 m
Overall length	C	1.44 m
Overall width	D	0.76 m
Overall height (rails up)	E	1.99 m
Transport height (rails down)	F	1.62 m
Platform dimensions (length/width)		1.44 m x 0.76 m
Platform extension	G	0.60 m
Ground clearance (stowed)		0.06 cm
Ground clearance (raised)		0.02 cm
Wheelbase	H	1.05 m
Turning radius (inside)		-
Turning radius (outside)		1.55 m
Driving motors		2 x 24V / 0.4 kW
Lifting motors		24V / 1.2 kW
Travel speed (stowed)		4 km/h
Travel speed (raised)		0.60 km/h
Batteries		24 V / 85 Ah
Integrated battery charger		24 V/15 A
Gradeability		25%
Maximum working slope		X -1,5° / Y -3°
Non-marking tyres		230 x 80 mm
Weight (CE)		920 kg



Non-marking solid tyres



Driving motor protection

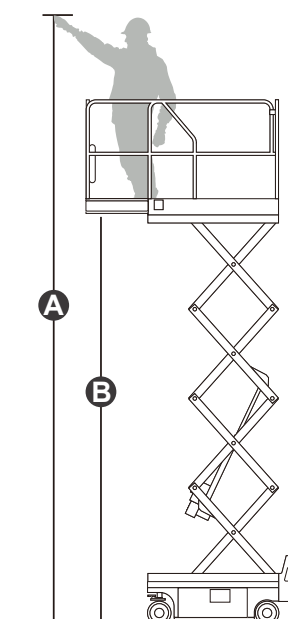

STANDARDS MET: EN 280-1, ANSI/SAIA A92.20

The data given in this brochure are provided for information purposes and are subject to change without prior notice. All images are purely guideline and might not give an exact representation of the product.