


CLAMSHELL
BUCKETS
CLA-S · CLA-SR


HANDLING OF LOOSE MATERIAL,
MUD RUBBLE, DIGGING



CLA-S
closed side walls

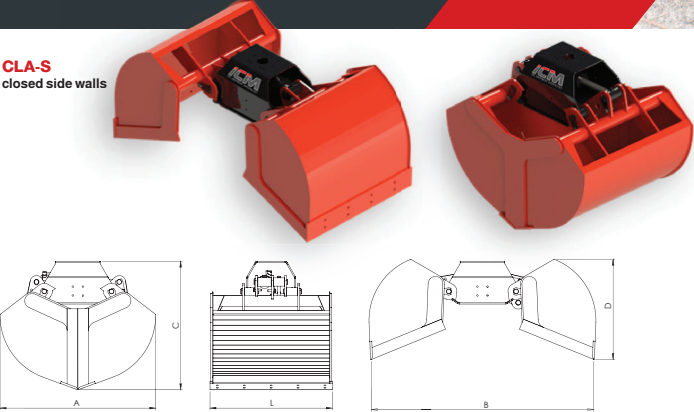

CLA-SR
open side walls

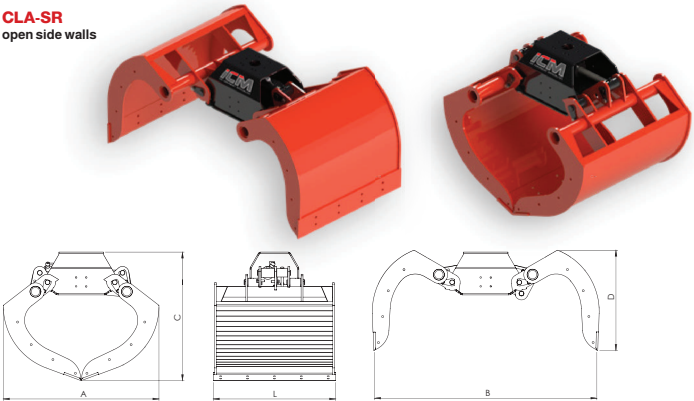

EXCAVATORS	TON	4-6		6-8		8-12		12-16	
MODEL		CLA-S 303	CLA-SR 303	CLA-S 403	CLA-SR 403	CLA-S 503	CLA-SR 503	CLA-S 653	CLA-SR 653
SIDE WALLS		CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN	CLOSED	OPEN
CAPACITY (MAX LOAD)	lt (kg)	370 (2000)	370 (2000)	480 (2500)	480 (2500)	610 (3000)	610 (3000)	730 (3000)	730 (3000)
WEIGHT	kg	356	316	380	340	410	370	440	400
CLAMPING FORCE	daN	2500	2500	2500	2500	2500	2500	2500	2500
MAX PRESSURE	bar	250	250	250	250	250	250	250	250
A	mm	1272	1272	1272	1272	1272	1272	1272	1272
B	mm	1818	1818	1818	1818	1818	1818	1818	1818
C	mm	1051	1051	1051	1051	1051	1051	1051	1051
D	mm	818	818	818	818	818	818	818	818
L	mm	640	640	800	800	1000	1000	1200	1200

OPTIONAL

RECOMMENDED HYDRAULIC ROTATORS	GR 465	GR 465	GR 603DB	GR 603DB	GR 104DB	GR 104DB	GR 16S	GR 16S
	All available rotators are on page 38-42							
BOLT-ON SIDE WALLS Only for CLA-SR	BOLTED TEETH		BOLTED HOOK					

**DESIGNED TO WITHSTAND
THE HEAVIEST CONDITIONS**

**BLADES AND
COUNTER-BLADES
IN HIGH-QUALITY WEAR
RESISTANT STEELS**

**LOCK VALVE INCLUDED,
WHICH ENSURES THAT THE
BUCKET REMAINS CLOSED
EVEN IF A HOSE BREAKS**