


SP8042T

TRACKED CONVEYOR

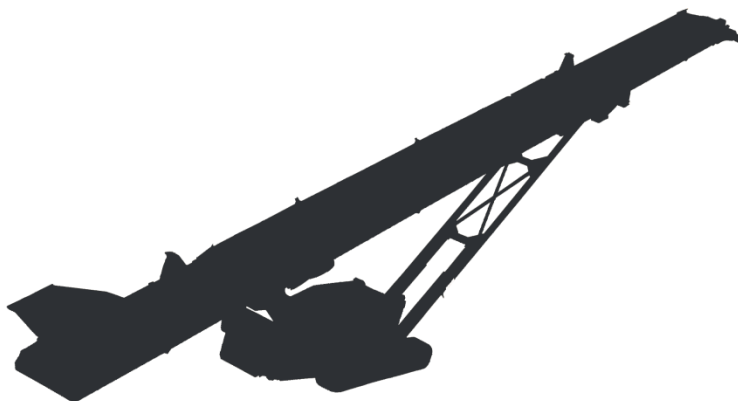

SP8042T TRACKED CONVEYOR

Length	23m (75')
Width	2.3m (7' 5")
lowest operating angle	0° (horizontal)
Max discharge height Feedboot	10.5m (34' 5")
length	2.45m (8'-0.5")
Feedboot width	2.06m (6' 9")
Feedboot capacity	1.6m³(2.1yd³)
Diesel tank	170L (37 gallon/45 US gallon)
Hydraulic tank	323L (71 gallon/85 US gallon)
Tracks - width	400mm
Tracks - speed	1km/h
Max feed size	100mm
Capacity	up to 500 tph
Machine weight	14,500 kg 16 US TON 30864 lbs
Working length	21-23m (54'6" - 60')
Working width	up to 2.3m (7' 5")
Working height	10.5m (34' 5")
Transport length	12.8 RORO 12m (39' 3") CONTAINER
Transport width	2.30m (7'5")
Transport height	2.59m (8' 3"), 3.1m RORO



OPTIONS

1. Belt upgrade - 4 ply
2. Chevron belt
3. Side skirts
4. Dust canopy
5. Power unit options-

TIER 3 JCB444 DieselMAX 63Kw - ROW

TIER 4i - JCB444 EcoMAX 68Kw - EU (Until Dec 2019)

TIER 4F (CAT) - JCB444 EcoMAX 55kW – USA

STAGE V - DEUTZ 2.9 L4 - 50Kw (67hp) - EU