
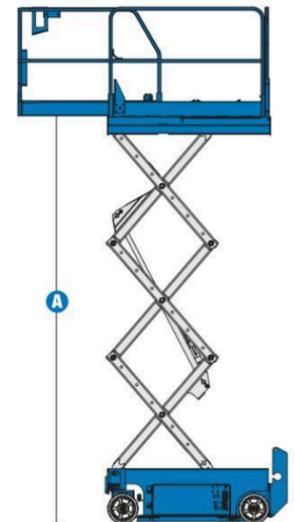



# Specifications

MODELS	GS™-1532		GS™-1932	
MEASUREMENTS	Metric	US	Metric	US
Working height max*	6.4 m	21 ft	7.6 m	25 ft
<b>A</b> Platform height max	4.5 m	15 ft	5.8 m	19 ft
<b>B</b> Platform length - outside	1.64 m	64.4 in	1.64 m	64.4 in
extended	2.54 m	100 in	2.54 m	100 in
<b>C</b> Platform width - outside	74 cm	29.3 in	74 cm	29.3 in
Guardrail height: CE	1.0 m	40 in	1.0 m	40 in
Roll-out platform extension	91 cm	3 ft	91 cm	3 ft
Toeboard height	15 cm	6 in	15 cm	6 in
Height - stowed: platform	97 cm	3 ft 2.2 in	1.00 m	3 ft 3.5 in
<b>D</b> fixed rails	1.94 m	6 ft 5 in	2.00 m	6 ft 7 in
rails lowered	1.92 m	6 ft 4 in	1.95 m	6 ft 5 in
folding guardrails	2.02 m	6 ft 8 in	2.10 m	6 ft 11 in
rails folded	1.72 m	5 ft 8 in	1.74 m	5 ft 9 in
<b>E</b> Length - stowed	1.82 m	71.5 in	1.82 m	71.5 in
Length - stowed extended	2.73 m	9 ft	2.73 m	9 ft
<b>F</b> Width	81.3 cm	32 in	81.3 cm	32 in
<b>G</b> Wheelbase	1.32 m	52 in	1.32 m	52 in
<b>H</b> Ground clearance - centre	6.1 cm	2.4 in	6.1 cm	2.4 in
<b>I</b> - with pothole guards deployed	2 cm	.8 in	1.9 cm	.8 in



PRODUCTIVITY				
Lift capacity	272 kg	600 lbs	227 kg	500 lbs
Drive speed - stowed	4.2 km/h	2.5 mph	4.2 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability	30%	30%	30%	30%
Turning radius - inside	zero	zero	zero	zero
Turning radius - outside	1.55 m	61 in	1.55 m	61 in
Raise / lower speed	16 / 17 sec	16 / 17 sec	16 / 23 sec	16 / 23 sec
Controls	proportional		proportional	
Drive	dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel	
Tyres - solid non-marking	30 x 11 x 20 cm	12 x 4.5 x 8 in	30 x 11 x 20 cm	12 x 4.5 x 8 in

POWER				
Power source	24 V (4 6 V 245 Ah batteries)		24 V (4 6 V 245 Ah batteries)	
Hydraulic system capacity	20.8 L	5.5 gal	20.8 L	5.5 gal

WEIGHT**				
CE	1,238 kg	2,729 lbs	1,503 kg	3,314 lbs

STANDARDS COMPLIANCE	CE EN280, AS1418.10
----------------------	---------------------

\* The metric equivalent adds 2m to platform height, US adds 6ft to platform height.  
 \*\* Weight will vary depending on options and/or country standards.