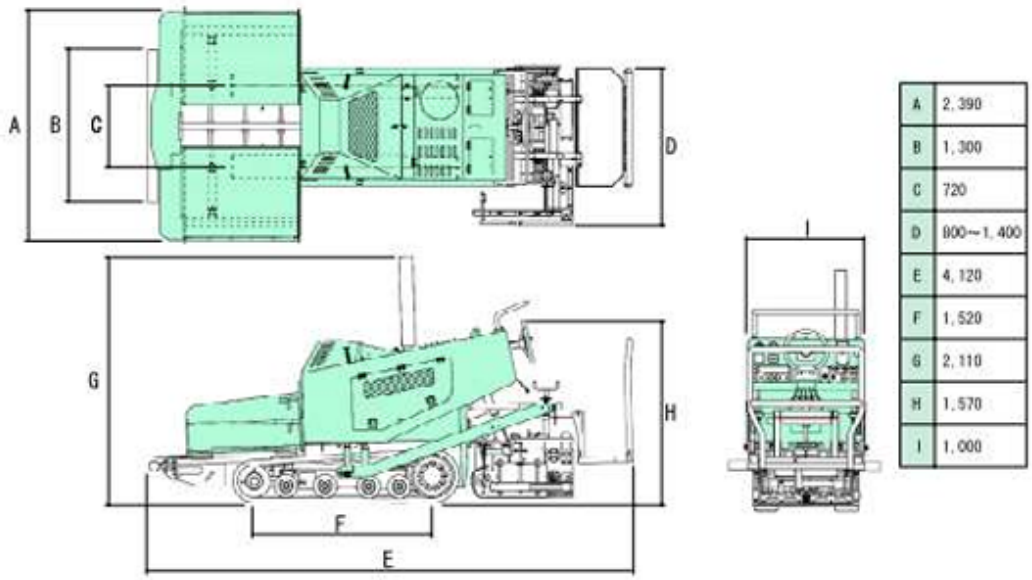


A	2, 390
B	1, 300
C	720
D	800~1, 400
E	4, 120
F	1, 520
G	2, 110
H	1, 570
I	1, 000

Specifications:

Paving width	800~1.400 mm
Paving thickness	10~80 mm
Paving speed	1~5 m/min
Transport speed	0~2,4 km/h
Hopper capacity	1,54 ton
Min. steering radius	5,0 m (outer side of the machine)

Dimensions and weight:

Overall lenght	4.120 mm
Overall width	1.000 mm
Overall high	1.570 mm
Weight	2.900 kg
Track width (C/C Distance)	720 mm
Track lenght	1.520 mm
Track shoe width	200 mm
Gradeability	36% (Transport) 19,4% (Working)

Engine:

Make & model	KUBOTA D1703-EKBF
Type	4 Stroke water cooled diesel
Displacement	1.647cc
Rated output	18,3kW/1.900min-1
Max.torque	98,3 N*m/1.500min-1

Screed:

Main screed	800 mm
Hydraulic extensions	375 mm
Screed crown	+3%~0%
Heating	4 gas burners with flame control
Laying thickness adjustment	Hydraulic cylinders + Hand operating cranks

Conveyor:

Width	350 mm
Rotating speed	0~26,8 m/min
Capacity	53,6 m³/h (teorical)

Auger:

Diameter and pitch	ø 230 x 200 mm
Speed	0~71 min-1
Drive	Hydraulic and reversible

Vibrator:

Vibration	Hydraulic with manual setting
Frequency	0~66,7 Hz