

Husmann

ZERKLEINERUNGS - KOMPOSTIERUNGS - TECHNIK

TWIN-SHAFT CRUSHER



WOOD CRUSHER & WASTE CRUSHER

WOOD CRUSHER & WASTE CRUSHER HL

Husmann
ZERKLEINERUNGS - KOMPOSTIERUNGS - TECHNIK

WOOD CRUSHER & WASTE CRUSHER HL

Husmann
ZERKLEINERUNGS - KOMPOSTIERUNGS - TECHNIK



Crushing unit
twin-shaft crusher

**Made in
Germany**



Crushing unit
HL-UNI 7.5

NEW HL-UNI 7.5

The HL series has been expanded by the model HL-UNI 7.5. Using the appropriate cutters, the new crusher with its all-purpose crushing shafts can achieve a fine and homogenous crushing quality.




Lift axle HL-UNI 7.5



HL-UNI 7.5

Size reduction with two crushing shafts is suitable for extreme materials and guarantees high throughput

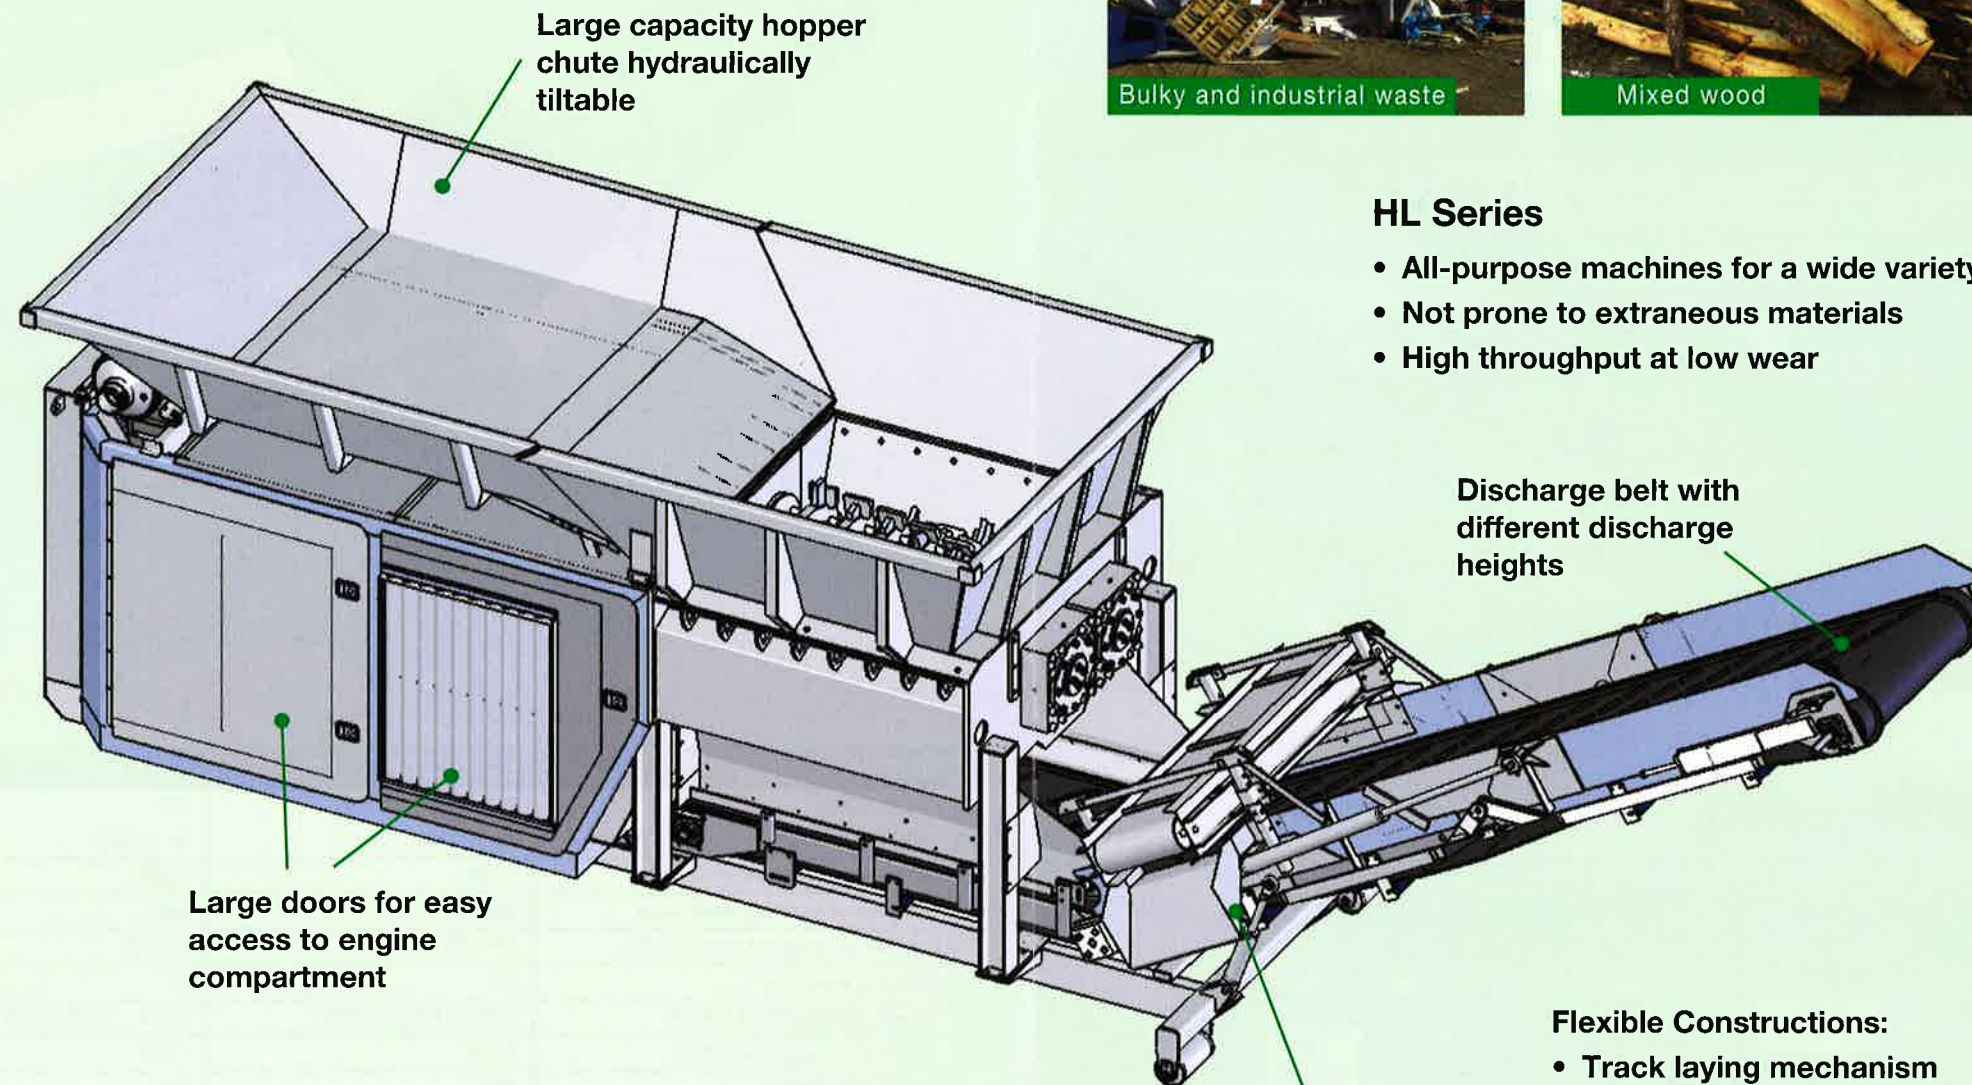

Large capacity hopper
chute hydraulically
tiltable

Large doors for easy
access to engine
compartment

Discharge belt with
different discharge
heights

Metal separator –
overband magnet



Bulky and industrial waste



Mixed wood

HL Series

- All-purpose machines for a wide variety of materials
- Not prone to extraneous materials
- High throughput at low wear



Ejection plates for reject material



Overband magnet

Flexible Constructions:

- Track laying mechanism
- Tandem axle trailer
- Hook-lift system
- Electro-static



HL II 1622 crawler track



HL II electro-static


Advantages of the HL-UNI 7.5 at a glance:

- Quick-change shafts
- Total weight max. 18.000 kg
- High performance with only 261 kW drive engine
- Discharge belt with large discharge height
- Versatile in use
- Economic and powerful

HL SERIES TWIN-SHAFT PRE-CRUSHER

Husmann
ZERKLEINERUNGS - KOMPOSTIERUNGS - TECHNIK

- **Composting**
- **Refuse Derived Fuel Treatment**
- **Volume Reduction**

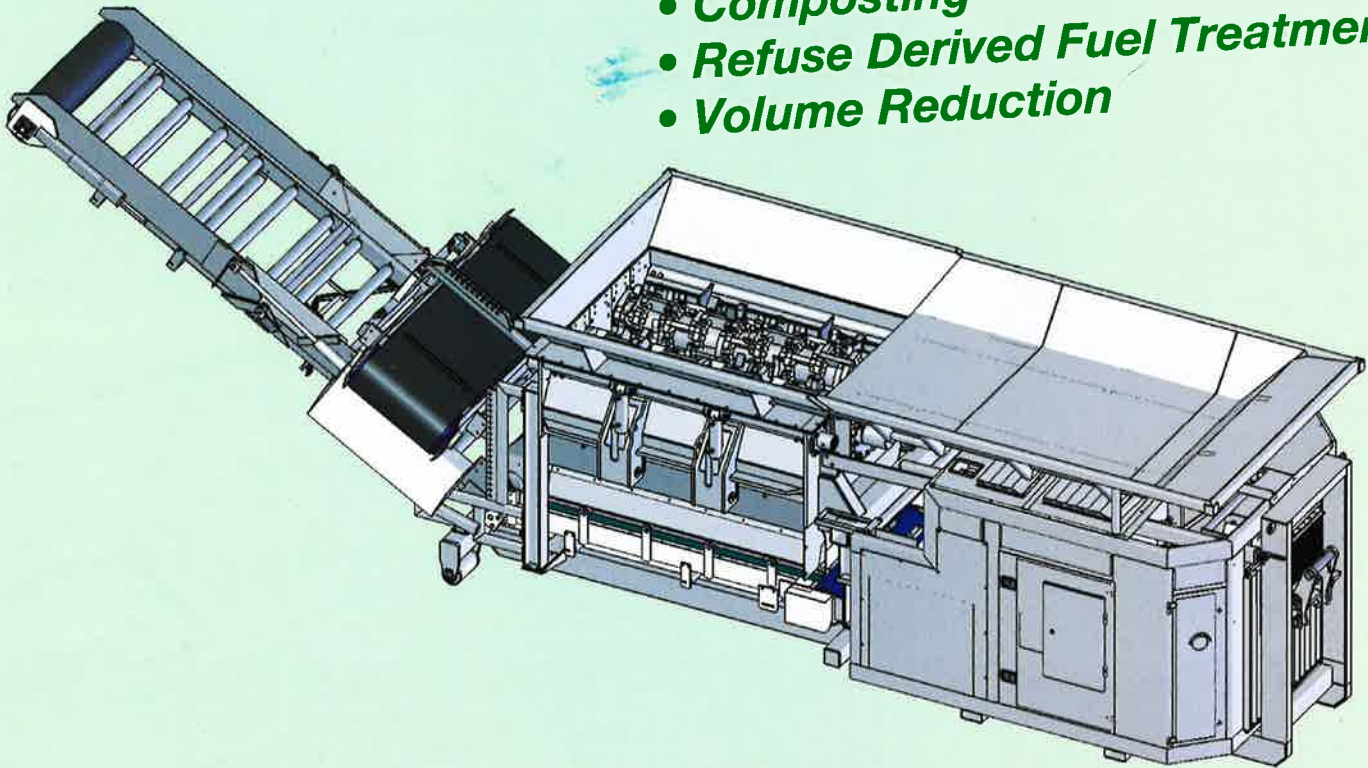

Technical Data Chassis	HL II 1617	HL II 1622	HL-UNI 7.5
Power (kW)	354	354	261
Total weight (kg)	ca. 21.000	ca. 22.500	ca. 18.500
Length of crushing shaft (mm)	1.700	2.260	1.565
Diameter of crushing shaft (mm)	660	660	690
Rotation of crushing shaft (r.p.m.)	20 – 36	20 – 36	20 – 36
Crushing tools (qty.)	24	32	70
Hopper dimensions (LxWxH)	5.450 x 2.500 x 410	6.010 x 2.500 x 410	5.200 x 2.440 x 750
Width of conveyor belt (mm)	1.400	1.400	1.200
Diesel tank (litres)	600	600	330
Machine dimensions (LxWxH)	10.900 x 2.500 x 2.700	10.900 x 2.500 x 2.700	10.016 x 2.440 x 2.700
Supplementary equipment	Radio controls, sprinkler system, hopper raising, magnetic roller, overband magnet, electric drive, track laying mechanism, tandem axle trailer, ejection plates for reject material, lift axle, return fan, central lubrication, special painting		

Subject to techn. changes

Maschinen- & Landmaschinenfabrik Husmann GmbH

Gerhard-Husmann-Str. 2
D-49762 Lathen
Tel.: +49 (0)5933 - 93180
Fax: +49 (0)5933 - 931850
E-Mail: info@husmann-web.de
www.husmann-web.de



Distributor

Stand 04/2014