




Any day.
Any weather.




Rotary sweepers

SAMI rotary sweepers are intended for clearing hard paved roads and squares from debris, litter, leaves, light snow or gravel and other similar materials. Working with the sweeper is efficient thanks to the floating design of the sweeper frame.




VERTICAL FLOATING

Rotary sweeper follows the unevenness of the ground thanks to the suspension system with shock absorbers and springs.




WATER TANK

Optional 190 liter water tank, which is mounted between the hitch and the sweeper frame does not limit visibility.




HORIZONTAL FLOATING

Rotary sweeper follows the slope of the ground thanks to the horizontal floating system up to ± 7 degrees.



BEELINE®


All SAMI sweepers use high-quality Beeline® brush rings produced in Finland.



TURNING ANGLE

Rotary sweeper can be turned hydraulically up to ± 30 degrees.



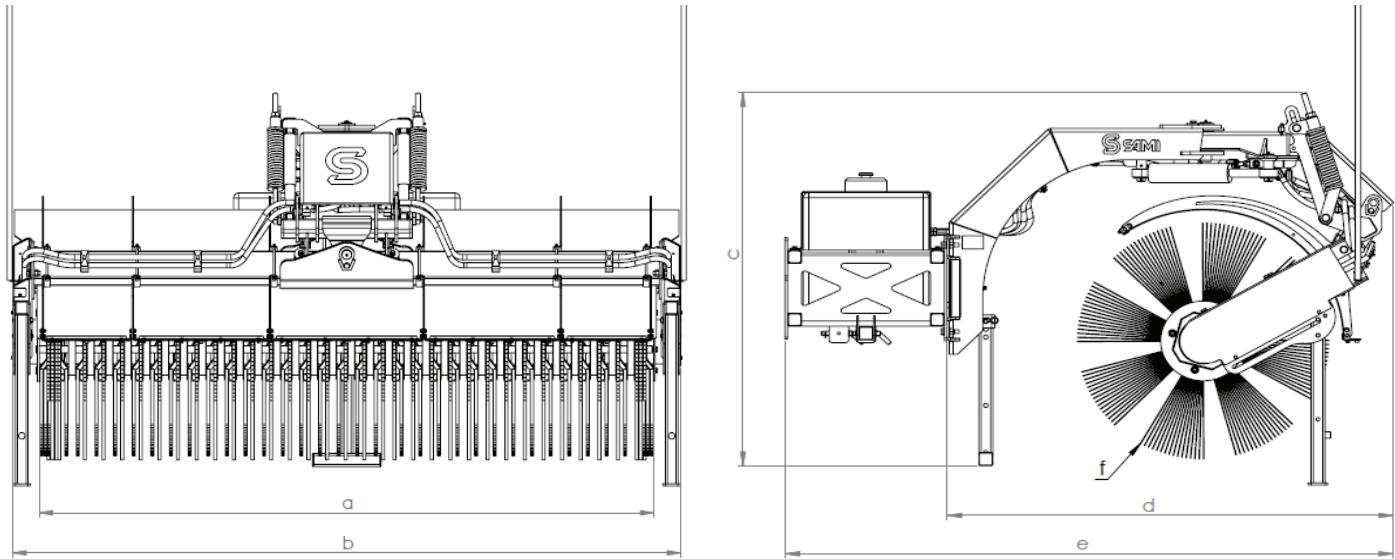

► It is possible to add a 600 l water tank set (cat. 1 + cat. 2) or a 1000 l water tank frame (cat. 2) to the tractor's 3P rear hitch.

Models	HB-2500	HB-3000
Working width (a) (mm)	2441	2941
Width (b) (mm)	2648	3148
Height (c) (mm)	1318	1318
Length (d / e) (mm)	1598 / 2178	1598 / 2178
Brush diameter (mm)	Ø900	Ø900
Turning angle (°)	±30	±30
Weight (kg)	465	475
Water tank (l)	190	190
Oil flow (min. - max.) (l/min)	50 - 100	50 - 100
Oil pressure (max.) (bar)	200 bar	200 bar
1/2" couplings	2 pairs	2 pairs
Rec. tractor weight (t)	3,5 - 8	4 - 8
Rec. tractor power (hp)	100 - 220	100 - 220
Rec. working speed (km/h)	5 - 20	5 - 20
Standard equipment	Hydraulic turning angle	
Additional equipment	Different water systems, LED lights	
Fastenings	All the most common fastenings	
Material	Made from SSAB steel	