
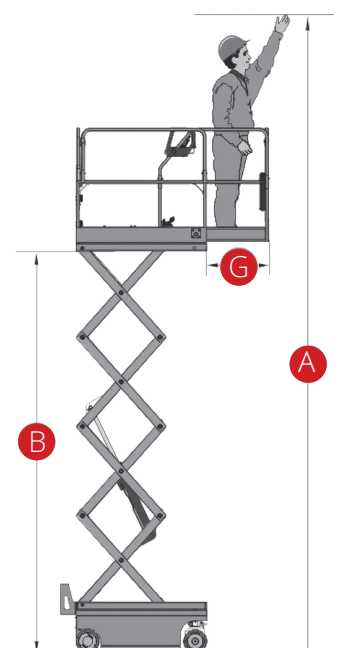




DS1218RT

Load capacity	454 kg
Load capacity on extended platform	136 kg
Max no. occupants	4
A Working height	12 m
B Platform floor height	10 m
C Overall length (with outriggers)	3.84 m
D Overall width	1.76 m
E Overall height (rails up)	2.59 m
Transport height (rails down)	1.82 m
F Platform size (length/width)	2.88x1.52 m
G Platform extension size	1.43 m
Ground clearance	24 cm
Wheelbase	2.29 m
Turning radius (inside/outside)	2.15 m / 4.85 m
Engine	Kubota D1105-EF02 Stage IV - 18.2 kW 3.000 rpm
Drive motor	-
Lifting motor	-
Travel speed (stowed)	5.2 km/h
Travel speed (raised)	0.48 km/h
Gradeability	40%
Maximum working slope	1.5°/3°
Batteries	12 V / 110 Ah
Integrated charger	-
Hydraulic tank	71 l
Diesel tank	47 l
Tyres	26x12-16.5
Weight (with outriggers)	4,300 kg

STANDARDS COMPLIANCE:
EN 280, ANSI/SAIA A92.20



Automatic stabilizers

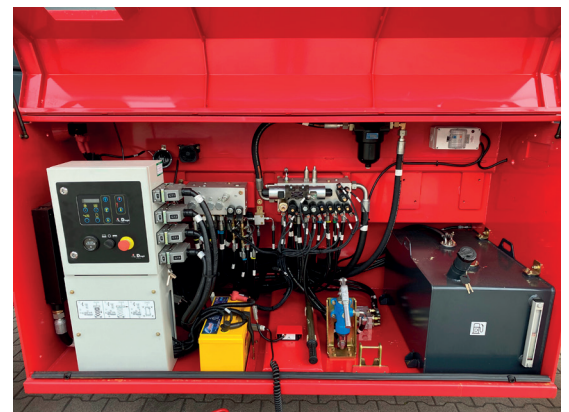

On-board diagnostic system