

DPX-18814 - Engine Model: KTA38-G5 - 1.100 kVA Standby



Genset Model

Prime Rating

Standby Rating

50 Hz	KTA38-G5	800 kW	1000 kVA	880 kW	1100 kVA
60 Hz	/	/	/	/	/

- ◆ Authorized Genset Original Equipment Manufacturer (GOEM) of Cummins Inc. and Chongqing Cummins
- ◆ Fully load tested and checked under standard procedures
- ◆ Tailor fit specific operational needs (please turn over)

Specifications

Engine	50 Hz	60Hz
Engine Model - Joint-venture Cummins	KTA38-G5	
Engine Speed	1500rpm	/
Fuel consumption (Standby) Litre/hour 100%	194	/
Fuel consumption (Prime) Litre/hour		
100%	178	/
75%	137	/
50%	96	/
25%	55	/
Engine Type	4-Cycle, 12 Cylinder	
Aspiration	Turbocharged & aftercooled	
Bore x Stroke	159mm x 159mm	
Displacement	38 Litre	
Compression Ratio	13.9:1	
Lubrication System - Total System Capacity	170.3 Litre	
Cranking Motor	24 Volt	
Fuel injection System	Cummins PT	

Control System

Standard Control Panel System

- ◆ Deep Sea Electronics: key start, auto start, synchronising
- ◆ ComAp Control: single gen-set controllers, paralleling gen-set controllers
- ◆ Analog Instrument Panel


Alternator

Alternator Model - STAMFORD Alternators	HCI634J
Rated Power Factor	0.8
Insulation System	Class H
Winding Pitch	Two Thirds
Winding Leads	6
Protection	IP23

Control System - Separately Excited By P.M.G.

A.V.R.	MX321	
Voltage Regulation	± 0.5 %	With 4% Engine Governing

Dimensions and Weights

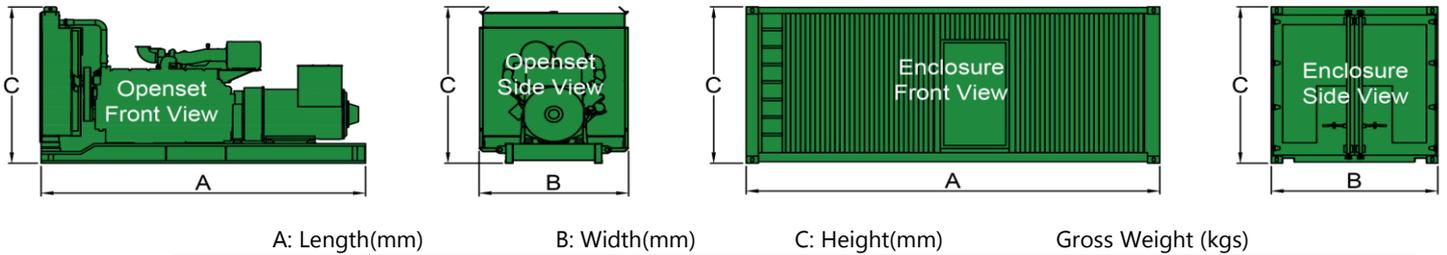

	A: Length(mm)	B: Width(mm)	C: Height(mm)	Gross Weight (kgs)
Open-set	4500	2010	2350	8250
Enclosure-set	6058	2438	2590	14000

** Dimensions and weights are for guidance only. Do not use for installation design.*

Available Options

We offer a wide range of optional equipment to tailor your generating sets so as to meet your operational needs. Options include:

- ◆ Alternator heater, engine heater or panel heater
- ◆ Circuit breaker 3P/4P
- ◆ Customisation of the fuel tank size
- ◆ Silencer
- ◆ Tailor-made enclosure sets

For further information on the standard or optional equipment accompanying this product, please feel free to contact us.

Documentation

A full set of operation and maintenance manuals as well as circuit wiring diagrams.

Warranty

Parts warranty up to 1500 hours or a year of operation whichever comes first. Please contact us for full details on warranty cover.

**All specifications are subject to change without notice.*