

## GROUND MOVING

- Extremely tough and rugged
- Angle up to 30 degrees
- Heavy cylinders
- Replaceable bolt-on edge
- Skid loader attachments



### DOZER BLADE

\* compact wheel loaders up to 80hp




Hydraulic hoses with quick couplings

Shockproof valve

## DOZER TILT BLADE

\* compact wheel loaders up to 80hp

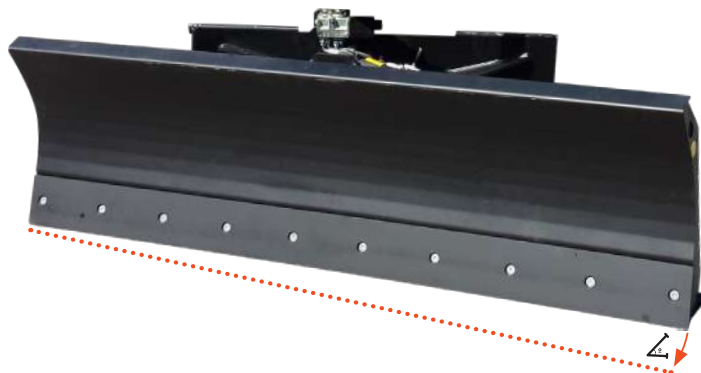

## LEVELING BOX DOZER BLADE



Hydraulic hoses with quick couplings

Shockproof valve

1/2" valve

Hydraulic oscillation +/- 8°

Standard electric kit


Proportional distributor

Rear pad with hydraulic control which neutralizes the riding effect

Laser control system

Bolt-in blade

Electrically controlled kit

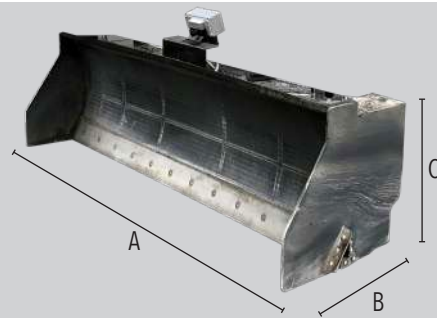

## DIMENSIONS

**LL 240**

A	<b>Width</b>	2430
B	<b>Depth</b>	830
C	<b>Height</b>	790

M3's self levelling blade suitable for backfilling works, drafting of landfill materials and indoor ground levelling with excellent finishing level.

With horizontal plane inclination system controlled by two hydraulic cylinders which allows the blade's up and down movement. Moreover equipped with an innovative rear skate managed by hydraulic cylinder with relief valve which keep fixed pressure on the skate to the ground to keep perfect levelling conditions even in case of ride controlled machines using and to neutralize riding effects.

Supplied with hydraulic proportional distributor, reliefs valve calibrate for having constant pressure, as option is available a wireless control system, levelling systems, receivers, wirings and receiver's poles. As option is available a wireless control system, levelling systems, receivers, wirings and receiver's poles.

### OPTIONALS

Wi-fi control system
----------------------





<b>MODEL</b>	<b>LL 240</b>
<b>Blade width [mm]</b>	2400
<b>Weight [kg]</b>	950
<b>Total blade height [mm]</b>	740
<b>Depth [mm]</b>	830

