


Turmdrehkran

32 TTR


30 - 57 m

Tower Crane / Grue à tour / Gru a torre / Grúa torre
Guindaste de torre / Башенный поворотный кран

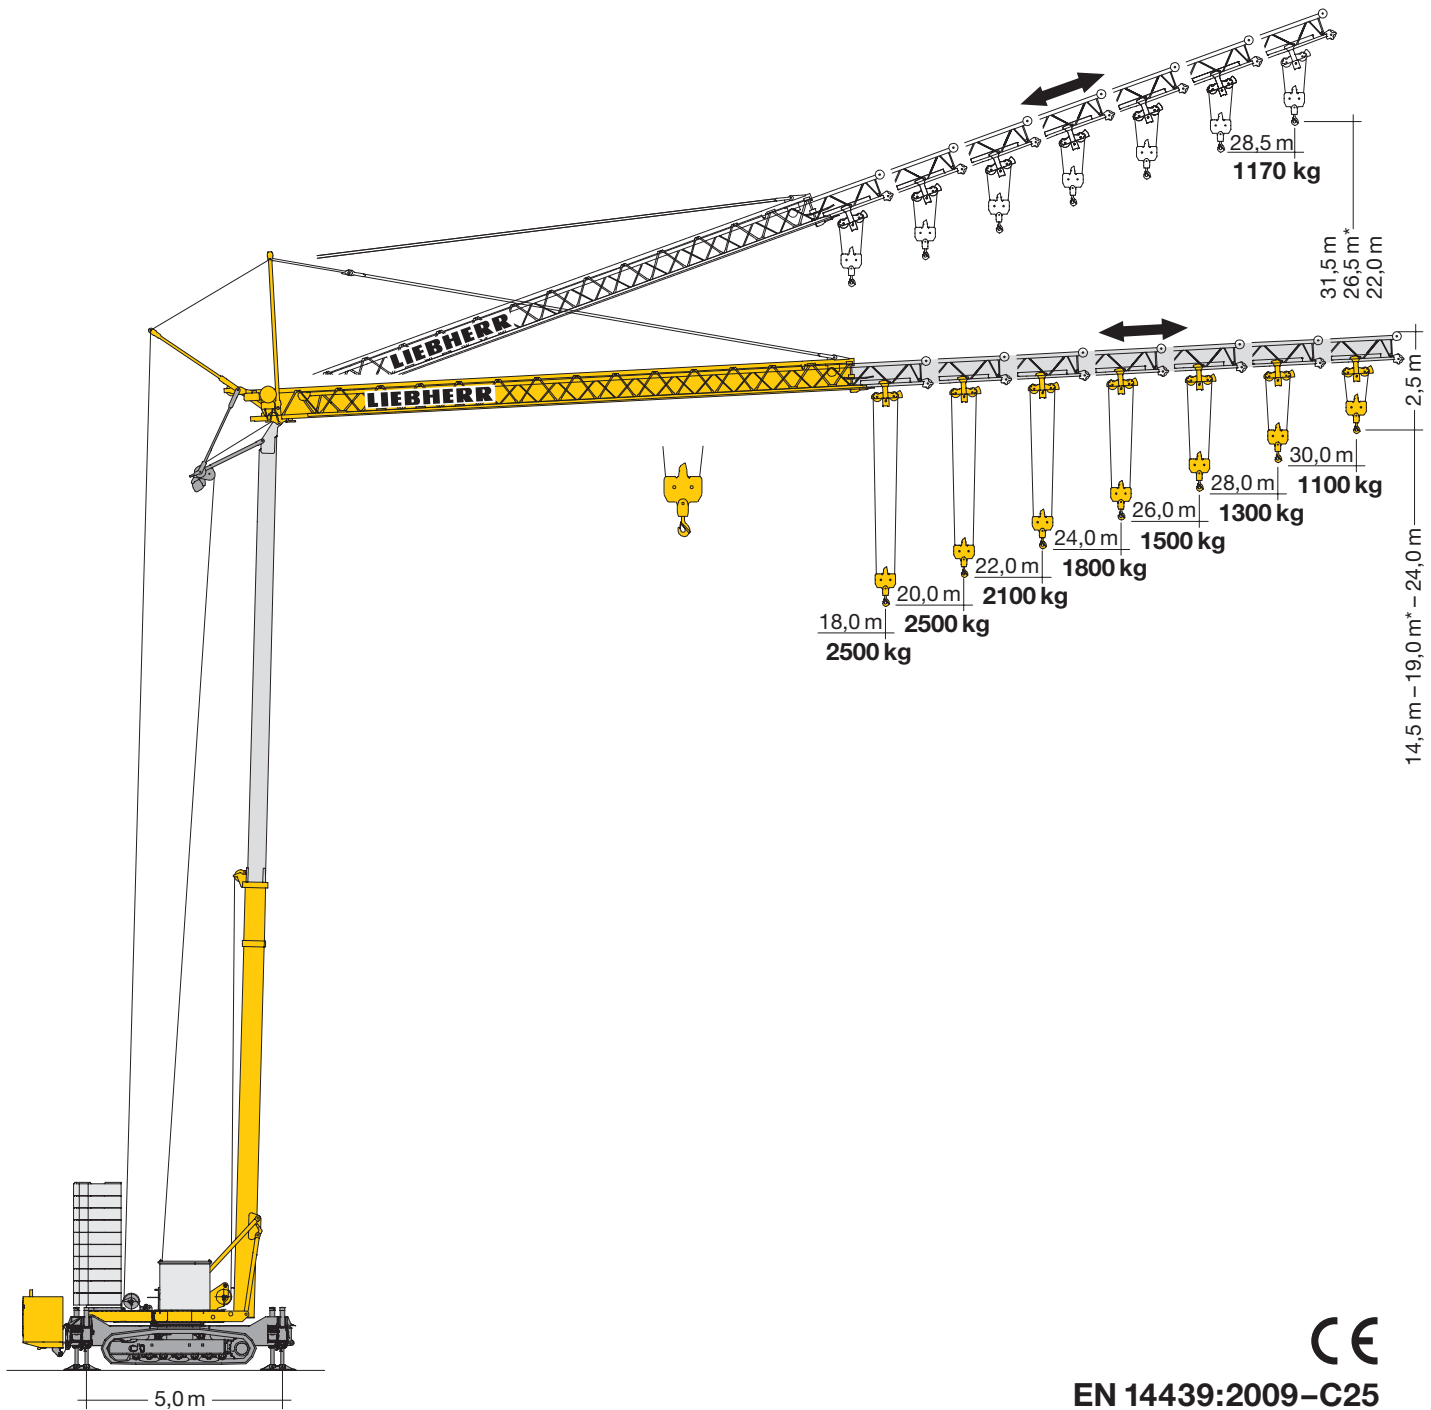

EN 14439:2009-C25

LIEBHERR

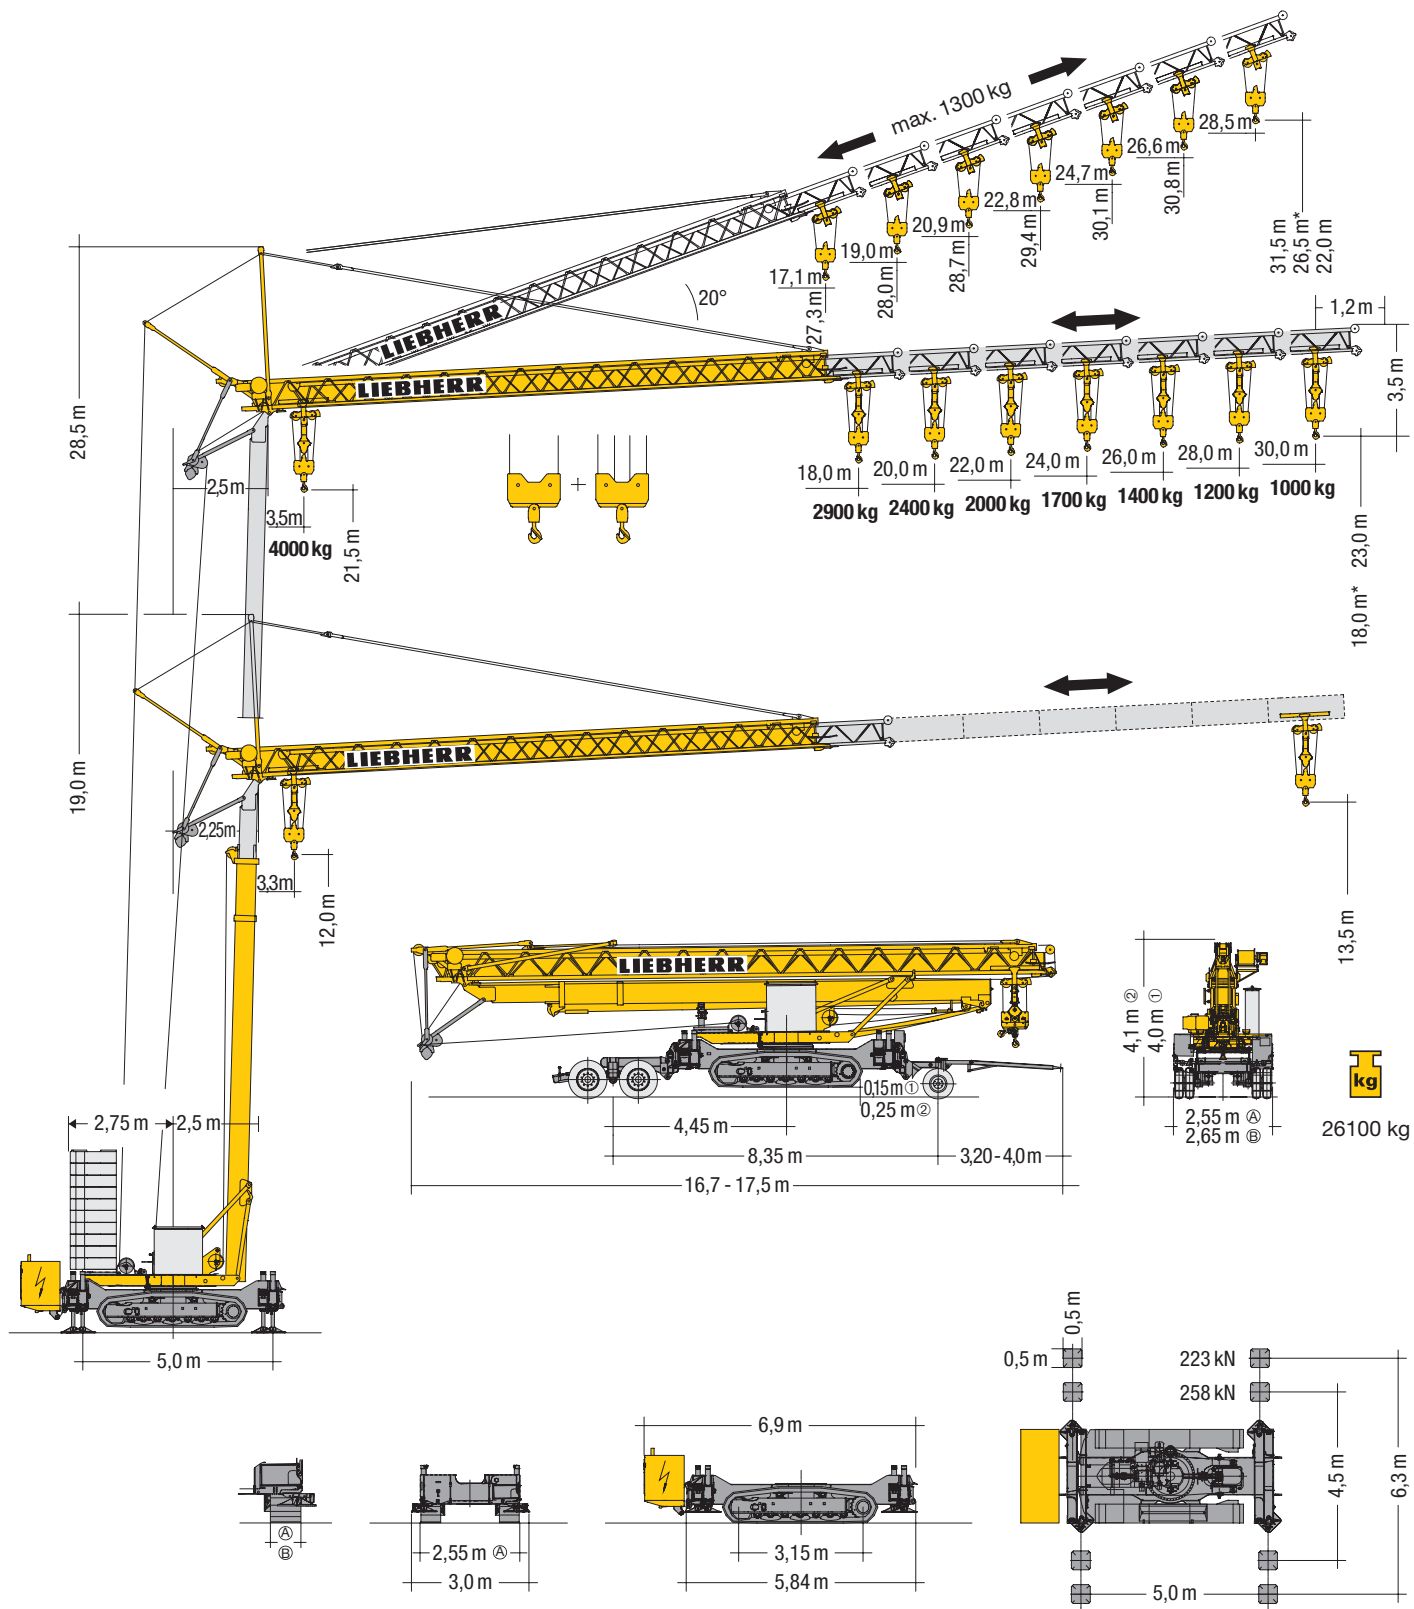

Gewicht Weight / Poids / Peso / Peso / Pesos / Macca

	17500 kg		ca. 23000 kg
--	----------	--	--------------

* **siehe Betriebsanleitung.** / see instruction manual.
voir manuel de service. / vedi manuale d'istruzione.
ver manual de instrucción. / ver manual de instruções.
см. инструкцию по эксплуатации.



Kettenbreite / Chain width / Largeur de chaîne
Larghezza cingoli / Anchura de cadena
Comprimento dos rastros
Ширина гусеницы

① 0,15 m $\triangleq$ 4,0 m
② 0,25 m $\triangleq$ 4,1 m

$\textcircled{A}$ = 0,5 m / $\textcircled{B}$ = 0,6 m

Ausladung und Tragfähigkeit

Radius and capacity / Portée et charge / Sbraccio e portata
Alcances y cargas / Alcance e capacidade de carga / Вылет и грузоподъемность

m	m/kg	5,0 m x 4,5 m / 5,0 m x 6,3 m														
		16,0	17,0	18,0	19,0	20,0	21,0	22,0	23,0	24,0	25,0	26,0	27,0	28,0	29,0	30,0
30,0	3,3 – 16,3 2500	2360	2180	2030	1900	1780	1670	1570	1490	1410	1340	1270	1210	1150	1100	
28,0	3,3 – 17,1 2500	2500	2340	2180	2030	1900	1790	1690	1600	1510	1440	1370	1300			
26,0	3,3 – 17,7 2500	2500	2440	2270	2120	1990	1870	1760	1670	1580	1500					
24,0	3,3 – 18,7 2500	2500	2500	2440	2280	2140	2020	1900	1800							
22,0	3,3 – 19,2 2500	2500	2500	2500	2380	2230	2100									
20,0	3,3 – 20,0 2500	2500	2500	2500	2500											
18,0	3,3 – 18,0 2500	2500	2500													


2500 kg, 2500 kg, 2100 kg, 1800 kg, 1500 kg, 1300 kg, 1100 kg

m	m/kg	5,0 m x 4,5 m / 5,0 m x 6,3 m														
		16,0	17,0	18,0	19,0	20,0	21,0	22,0	23,0	24,0	25,0	26,0	27,0	28,0	29,0	30,0
30,0	3,3 – 11,2 4000	2240	2070	1920	1780	1670	1560	1470	1380	1300	1230	1170	1110	1050	1000	
28,0	3,3 – 11,8 4000	2400	2220	2060	1920	1800	1680	1580	1490	1410	1330	1260	1200			
26,0	3,3 – 12,1 4000	2510	2320	2160	2010	1880	1760	1660	1570	1480	1400					
24,0	3,3 – 12,8 4000	2710	2510	2330	2180	2040	1910	1800	1700							
22,0	3,3 – 13,2 4000	2830	2620	2440	2270	2130	2000									
20,0	3,3 – 13,7 4000	2980	2760	2570	2400											
18,0	3,3 – 14,2 4000	3130	2900													

2900 kg, 2400 kg, 2000 kg, 1700 kg, 1400 kg, 1200 kg, 1000 kg

Auslegersteilstellung 20°

Elevated jib 20°
Flèche inclinée 20°
Braccio inclinato a 20°
Pluma inclinada 20°
Lança inclinada 20°
Положение стрелы под углом 20°

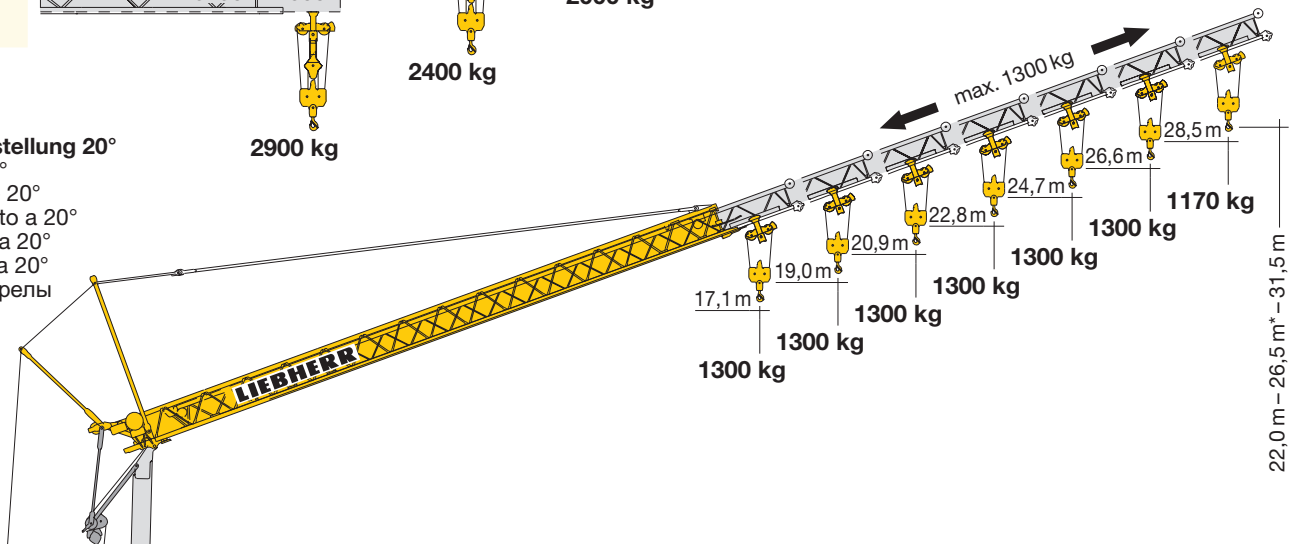

	30 %	15 %	8 %
	15 %	10 %	3 %
	14 N/cm² [Ⓐ] 12 N/cm² [Ⓑ]	25 N/cm² [Ⓐ] 21 N/cm² [Ⓑ]	25 N/cm² [Ⓐ] 21 N/cm² [Ⓑ]
V_{max}	25 m/min	10 m/min	10 m/min

Antriebe

Driving units / Mécanismes d'entraînement / Meccanismi / Mecanismos / Mecanismos / Приводы

	U/min. 0 ↔ 0,8 sl./min tr./min	3,0 kW EDC
	20,0 / 40,0 m/min	2,6 / 3,5 kW
	10,0 m/min	2,6 kW
	4,0 m/min	5,0 kW


	Stufe / Step / Cran / Marcia / Velocidad Velocidad / Передача	kg	m/min
11,0 kW KL 	1	2500	5,0
	2	2500	20,0
	3	1300	40,0
	1	2000 4000	5,0 2,5
	2	2000 4000	20,0 10,0
	3	1300 2600	40,0 20,0
11,0 kW FU 	1	2500	4,0
	2	2500	20,0
	3	1300	38,0
	4	1000	50,0
	1	2000 4000	4,0 2,0
	2	2000 4000	20,0 10,0
	3	1300 2600	38,0 19,0
	4	1000 2000	50,0 25,0





	400 V	Hz	kVA
50,0 m 77,0 m	4 x 6 mm² KL 4 x 6 mm² FU	50	22,0 KL 20,0 FU

	Hz	kVA
400 V / 3 ~	50	22

BGL 	C.0.08.0031		95 L _{WA} 70 dB(A)
---------	-------------	--	--------------------------------

	Hz	kVA
400 V / 3 ~ 230 V	50 50	66,0 (97 A) 20,0 (97 A)

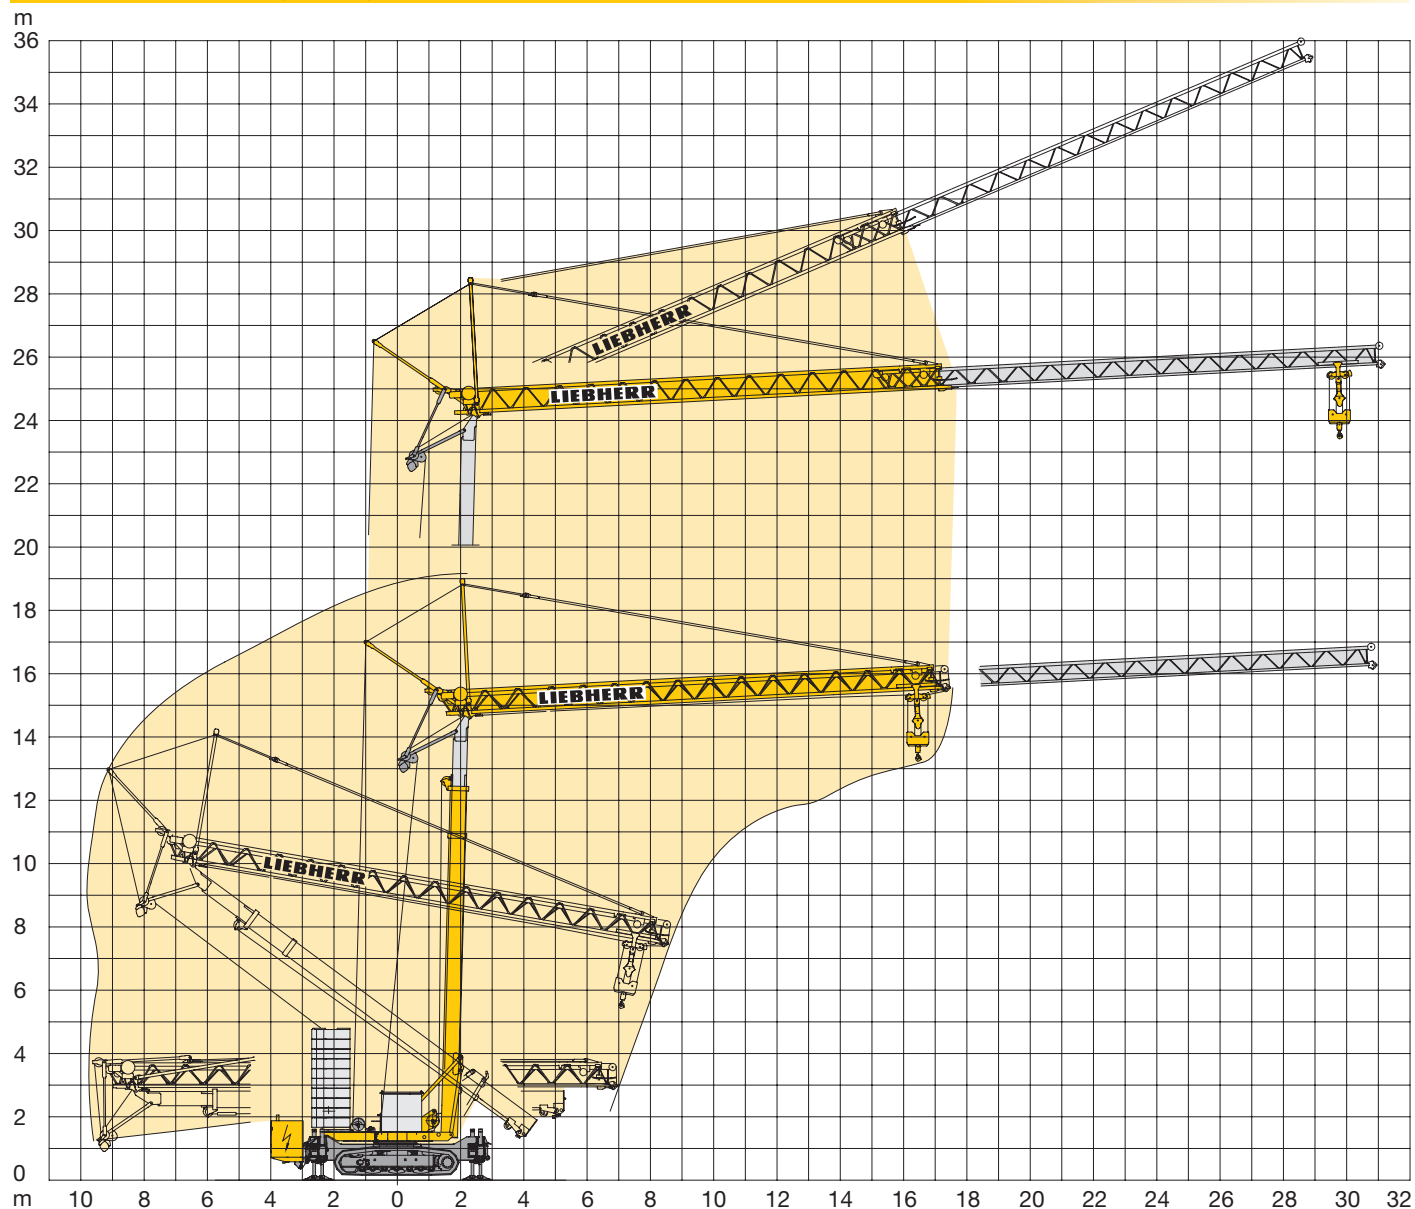

Pos.	Anz.					L (m)	B (m)	H (m)	kg
Item	Qty.								
Rep	Qte.								
Voce	Qta.								
Pos.	Cant.								
Ref.	Cant.								
Поз.	Кол-во								
1	1	Raupenunterwagen / Crawler undercarriage Châssis à chenilles / Carro cingolato Carro sobre rails / Carro de lagarta Опорная рама на гусеничном шасси				5,835	2,55 [Ⓐ] 2,65 [Ⓑ]	1,46	12000
2	1	Stromgenerator mit Konsole / Current generator with bracket / Générateur de courant avec semelle Generatore di corrente con supporto / Generator de corrente con consola / Gerador de corrente de consola / Генераторный агрегат с кронштейном			72 kVA	2,49	1,03	1,48	1350
3	1	Transportachse vorne Tra 100 KY 6A / Road transport axle front / Essieux de transport avant / Asse di trasporto anteriore / Eje delantero para transporte / Eixo de transporte dianteiro / Транспортировочная ось, передняя				3,63 - 4,13	1,42	1,10	920
4	1	Transportachse hinten Tra 204 GZ1 / Road transport axle behind / Essieux de transport arrière / Asse di trasporto posteriore / Eje trasero para transporte / Eixo de transporte traseiro / Транспортировочная ось, задняя				2,50	2,50	1,00	2000

Konstruktionsänderungen vorbehalten! / Subject to alterations! / Sous
réserves de modifications! / Riservato il diritto di modifiche strutturali!
¡Sujeto a modificaciones! / Salvo modificação da construação! / Права на
внесение конструкторских изменений сохраняются!

Sämtliche Angaben erfolgen ohne Gewähr. / This information is supplied without liability. / Ces
renseignements sont sans garantie. / Tutte le indicazioni fornite senza garanzia. / Declinamos
toda responsabilidad derivada de la información proporcionada. / Declinamos qualquer respon-
sabilidade quanto à informação fornecida. / Все данные указаны без обязательств.