

M-CRANE

1030 RT

FULL ELECTRIC DRIVE


TRAZIONE
COMPLETAMENTE
ELETTRICA

The M-Crane 1030 RT is a powerful and versatile crawler carrier equipped with a 990 kg - 1950 lbs maximum capacity Crane. With a ground clearance of a good 170 mm - 7", can be used in various heavy-duty applications both indoors and outdoors. Full electric drive, it has class-leading electric drive with two super quiet AC electric motors 5.3 kW each (rated IP67), and features three power management configurations:

M-Crane 1030 RT è un trasportatore cingolato potente e versatile, dotato di una gru con capacità massima di 990 kg. Con un'altezza da terra di ben 170 mm, può essere utilizzato in varie applicazioni pesanti sia all'interno che all'esterno. Con trazione completamente elettrica, è dotato di due motori elettrici super silenziosi da 5,3 kW ciascuno (con grado di protezione IP67), e dispone di tre opzioni di gestione dell'alimentazione:


ECO 1.2 km/h - 0.8 mi/h
STD 1.8 km/h - 1 mi/h
POW 4.2 km/h - 2.6 mi/h

Autonomy Autonomia	Load - Portata		Max Speed Velocità max
	0 Kg	1.500 Kg	
ECO	~3.500 m ~2,2 mi	~3.000 m ~1,9 mi	1,2 Km/h 0.8 mi/h
STD	~3.100 m ~1,9 mi	~2.500 m ~1,6 mi	1,8 Km/h 1 mi/h
POW	~2.700 m ~1,7 mi	~2.000 m ~1,2 mi	4,2 Km/h 2.6 mi/h

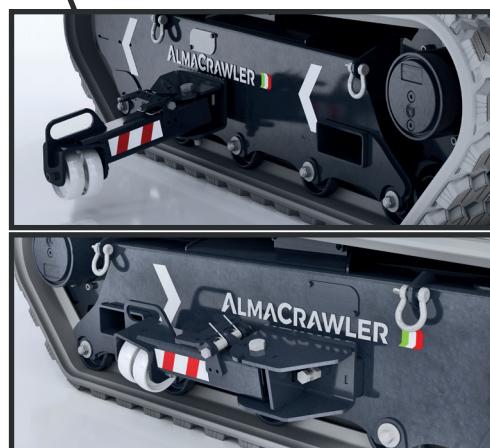


Equipped with a telescopic crane, it has a maximum lifting capacity of 990 kg - 1950 lbs and a variable outreach that can be used on slopes up to +/-10° longitudinal and +/- 5° lateral. The M-Crane 1030 RT, with a maximum capacity of 1500 kg - 3300 lbs, can handle a wide range of loads, making it a versatile solution for a variety of material handling needs.

Dotata di una gru telescopica, vanta una capacità massima di sollevamento di 990 kg e uno sbraccio variabile utilizzabile su pendenze fino a +/-10° longitudinalmente e +/- 5° lateralmente. La piattaforma M-Crane 1030 RT, con una portata massima di 1500 kg, è in grado di gestire una vasta varietà di carichi, rappresentando una soluzione versatile per le diverse esigenze di movimentazione dei materiali.




M-CRANE 1030 RT

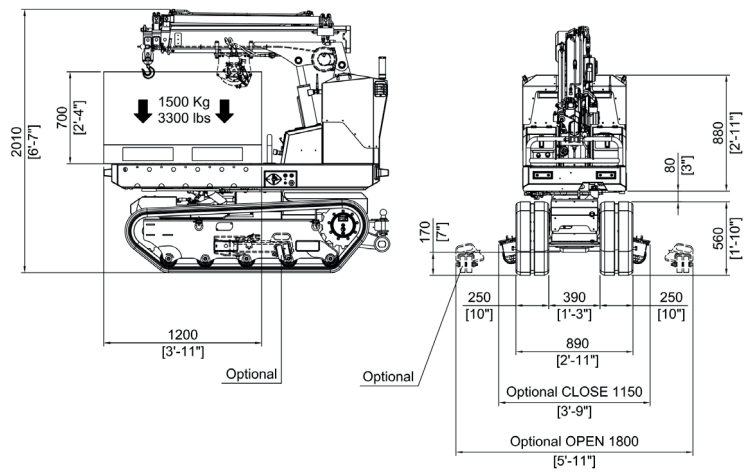


Static Diagrams - Kg / m

Static diagram from +10° up to -3° long./ ±5° lat.

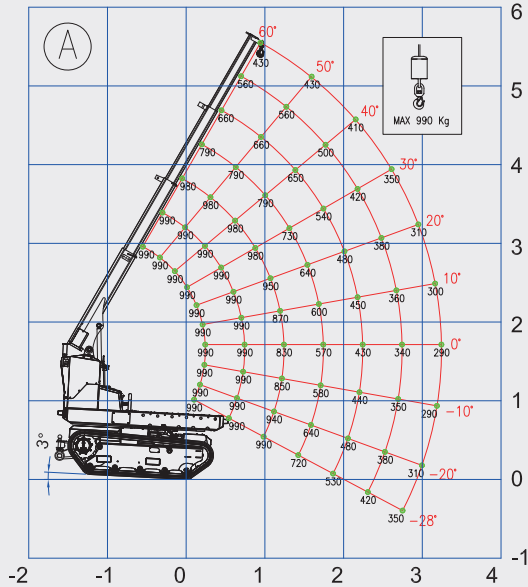


Static diagram from -3° up to -10° long./ ±5° lat.

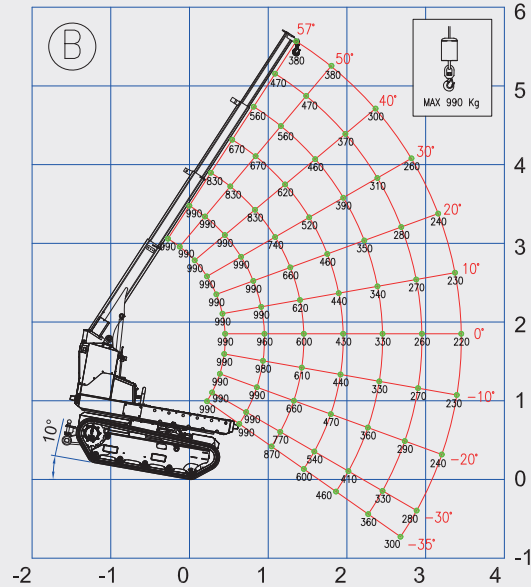

Static Diagrams - lbs / ft

Static diagram from +10° up to -3° long./ ±5° lat.

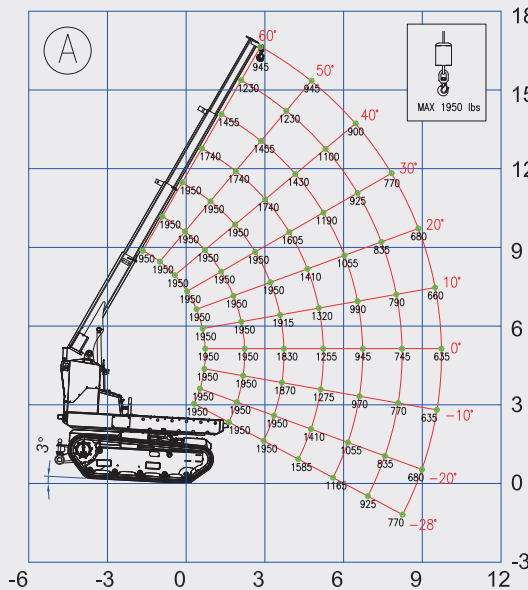

Static diagram from -3° up to -10° long./ ±5° lat.

